ALEDO.SK

NOTRAX®
Justrite Safety Group

Mats for Professional Use

Ergonomic Anti-Fatigue and Safety Matting

Index and Guide

Art	Product	Page
	Workplace Solutions for Dry Areas	**10**
782	Sky Trax®	12
479	Cushion Trax®	14
489	Cushion Flex™	16
406	Crossrib Sof-Tred™	19
413	Gripper Sof-Tred™	19
417	Bubble Sof-Tred™	19
419	Diamond Sof-Tred™	19
408	Airug® Plus	21
409	Sof-Tred Plus™	21
410	Airug®	21
411	Sof-Tred™	21
649	Safety Stance Solid™	22
546	Diamond Flex™ Series	24
556	Cushion Ease Solid™ Series	26
570	De-Flex™ Series	28
460	SkywalkerHD™ Series	30
460	SkywalkerHD™ Accessories	32
426	Posture Mat™	35
425	Posture Mat Classic™	35
450	Skywalker® PUR Series	38
455	Skystep™ Series	40
526G	Sani-Flex™	40
	Workplace Solutions for Wet Areas	**42**
549	Safety Stance™	44
550	Cushion Ease™ Series	46
563	Sanitop Deluxe™	49
562	Sanitop™	49
567	Superflow® XT Nitrile	49
T23	Multi Mat II®	49
537	Flexdek™	51
539	Gripwalker™	51
620	Diamond Flex Lok™	53
620	Diamond Flex Lok™ Solid	53

Art	Product	Page
	Electrostatic Discharge (ESD) Solutions	**54**
826	Diamond Stat™	57
825	Cushion Stat™	57
828	High Tech POP™ 3 Layer	59
829	Anti-Stat POP™ 3 Layer	59
827	Anti-Stat POP™	59
ESD Accessories		60
754	Rib 'n' Roll™ ESD 3 mm fine rib	61
743	Conductive Runner™	61
	Industrial Specialties	
832	Switchboard Matting™ Series	65
979	Saddle Trax®	67
580	Sorb Stance™	69
585	Eco Stance™	69
040	Slabmat Carre™	71
045	Slabmat™	71
	Rubber Runners & Liners	**73**
	Food Processing & Food Service Matting Solutions	**76**
526	Sani-Flex™	79
550RD	Cushion Ease™ Red	81
563RD	Sanitop Deluxe™ Red	81
458	Skystep™ Red	83
562	Sanitop™ Red	83
566	Superflow® XT Series	85
567	Superflow® XT Nitrile	85
T23	Multi Mat II®	85
346	Sani-Trax™	87
348	Sani Master®	89
	Anti-Slip Hygienic Matting Solutions	**90**
536	Akwadek™	93
538	Gripwalker Lite™	93
535	Soft-Step™	93
	Chemical Resistance Chart	95

Dry Areas - Heavy Duty Industrial

782 Sky Trax®

Top-of-the-line ergonomic experience where comfort, durability, and safety are united. Ergonomic benefit derived from unique bubble design coupled with 19 mm thick worker platform.

Combination of extra hard wearing top surface and a very resilient microcellular vinyl base for maximum fatigue relief.

782 Sky Trax®

Favours slip resistance and freedom of movement; tested R9 according to DIN51130 and BG-rule BGR181. Featured with RedStop™ slip resistant backing to prevent mats from shifting. Available yellow borders along sides comply with OSHA code 1910-144. Bevelled edges on all four sides to minimize risk of tripping. Lifetime warranty on Uni-Fusion™ lamination technology.

Recommended uses:

- Heavy duty - dry industrial environments in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual workstations. Also suitable for commercial environments including hotels, reception desks, shop counters, department stores, banks, restaurants, etc.

Specifications:

- 5 mm PVC top surface permanently bonded onto a 14 mm resilient backing of microcellular vinyl
- Overall thickness: 19 mm
- Weight: 6.9 kg per m²
- Fire classification Cfl-S2 tested according to DIN EN ISO 13501

Colours:

- Grey, Black, Black/yellow

Stock sizes:

- 60 cm x 91 cm
  91 cm x 150 cm
  91 cm x 2 m
  91 cm x 3 m
  91 cm x 6 m

Full rolls 21.9 m:

- 60 cm, 91 cm, 122 cm and 152 cm widths

Custom lengths:

- 60 cm, 91 cm, 122 cm and 152 cm widths

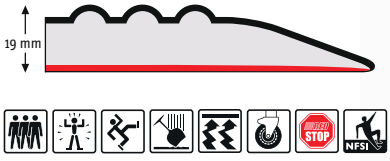

Dry Areas - Heavy Duty Industrial

479 Cushion Trax®

Bestselling anti-fatigue mat with ergonomic benefit derived from a 14-mm thick worker platform comprised of a long wearing top surface laminated onto a resilient microcellular vinyl base for maximum durability, comfort, and insulation from hard floors and vibrations.

Diamond plate pattern provides traction while allowing easy twist turns. The design and material composition make this the most versatile matting solution for fatigue relief in both static and dynamic working positions.

479 Cushion Trax®

Slip resistance R10 according to DIN51130 and BG-rule BGR181. Tested and certified by the National Floor Safety Institute (NFSI). Featured with RedStop™ slip resistant backing to prevent mats from shifting. Available yellow borders along sides comply with OSHA code 1910-144. Bevelled edges on all four sides to minimize risk of tripping. UniFusion™ technology engineered to resist in the harshest work environments.

Recommended uses:

- Heavy duty - dry industrial environments in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual workstations. Also suitable for commercial environments including hotels, reception desks, shop counters, department stores, banks, restaurants, etc.

Specifications:

- 4.7 mm PVC top surface permanently bonded onto a 9.3 mm resilient backing of microcellular vinyl
- Overall thickness: 14 mm
- Weight: 5.5 kg per m^2
- Fire classification Bfl-S1 tested according to EN 13501-1
- Coefficient of friction NSFI certified
- REACH compliant

Colours:

- Grey, Black, Black/yellow

Stock sizes:

- 60 cm x 91 cm
  91 cm x 150 cm
  91 cm x 3 m
  91 cm x 6 m

Full rolls 22.8 m:

- 60 cm, 91 cm, 122 cm and 152 cm widths

Custom lengths:

- 60 cm, 91 cm, 122 cm and 152 cm widths

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

Dry Oily Areas - Heavy Duty Industrial

489 Cushion Flex®

Oil-resistant version of the Cushion Trax®. Best known for its diamond plate top surface and high level of ergonomic comfort in both dynamic and stationary working positions.

A 12.7-mm thick worker platform offers maximum durability, comfort, and insulation from hard floors and vibrations. 100% nitrile rubber compound is resistant to most industrial oils.

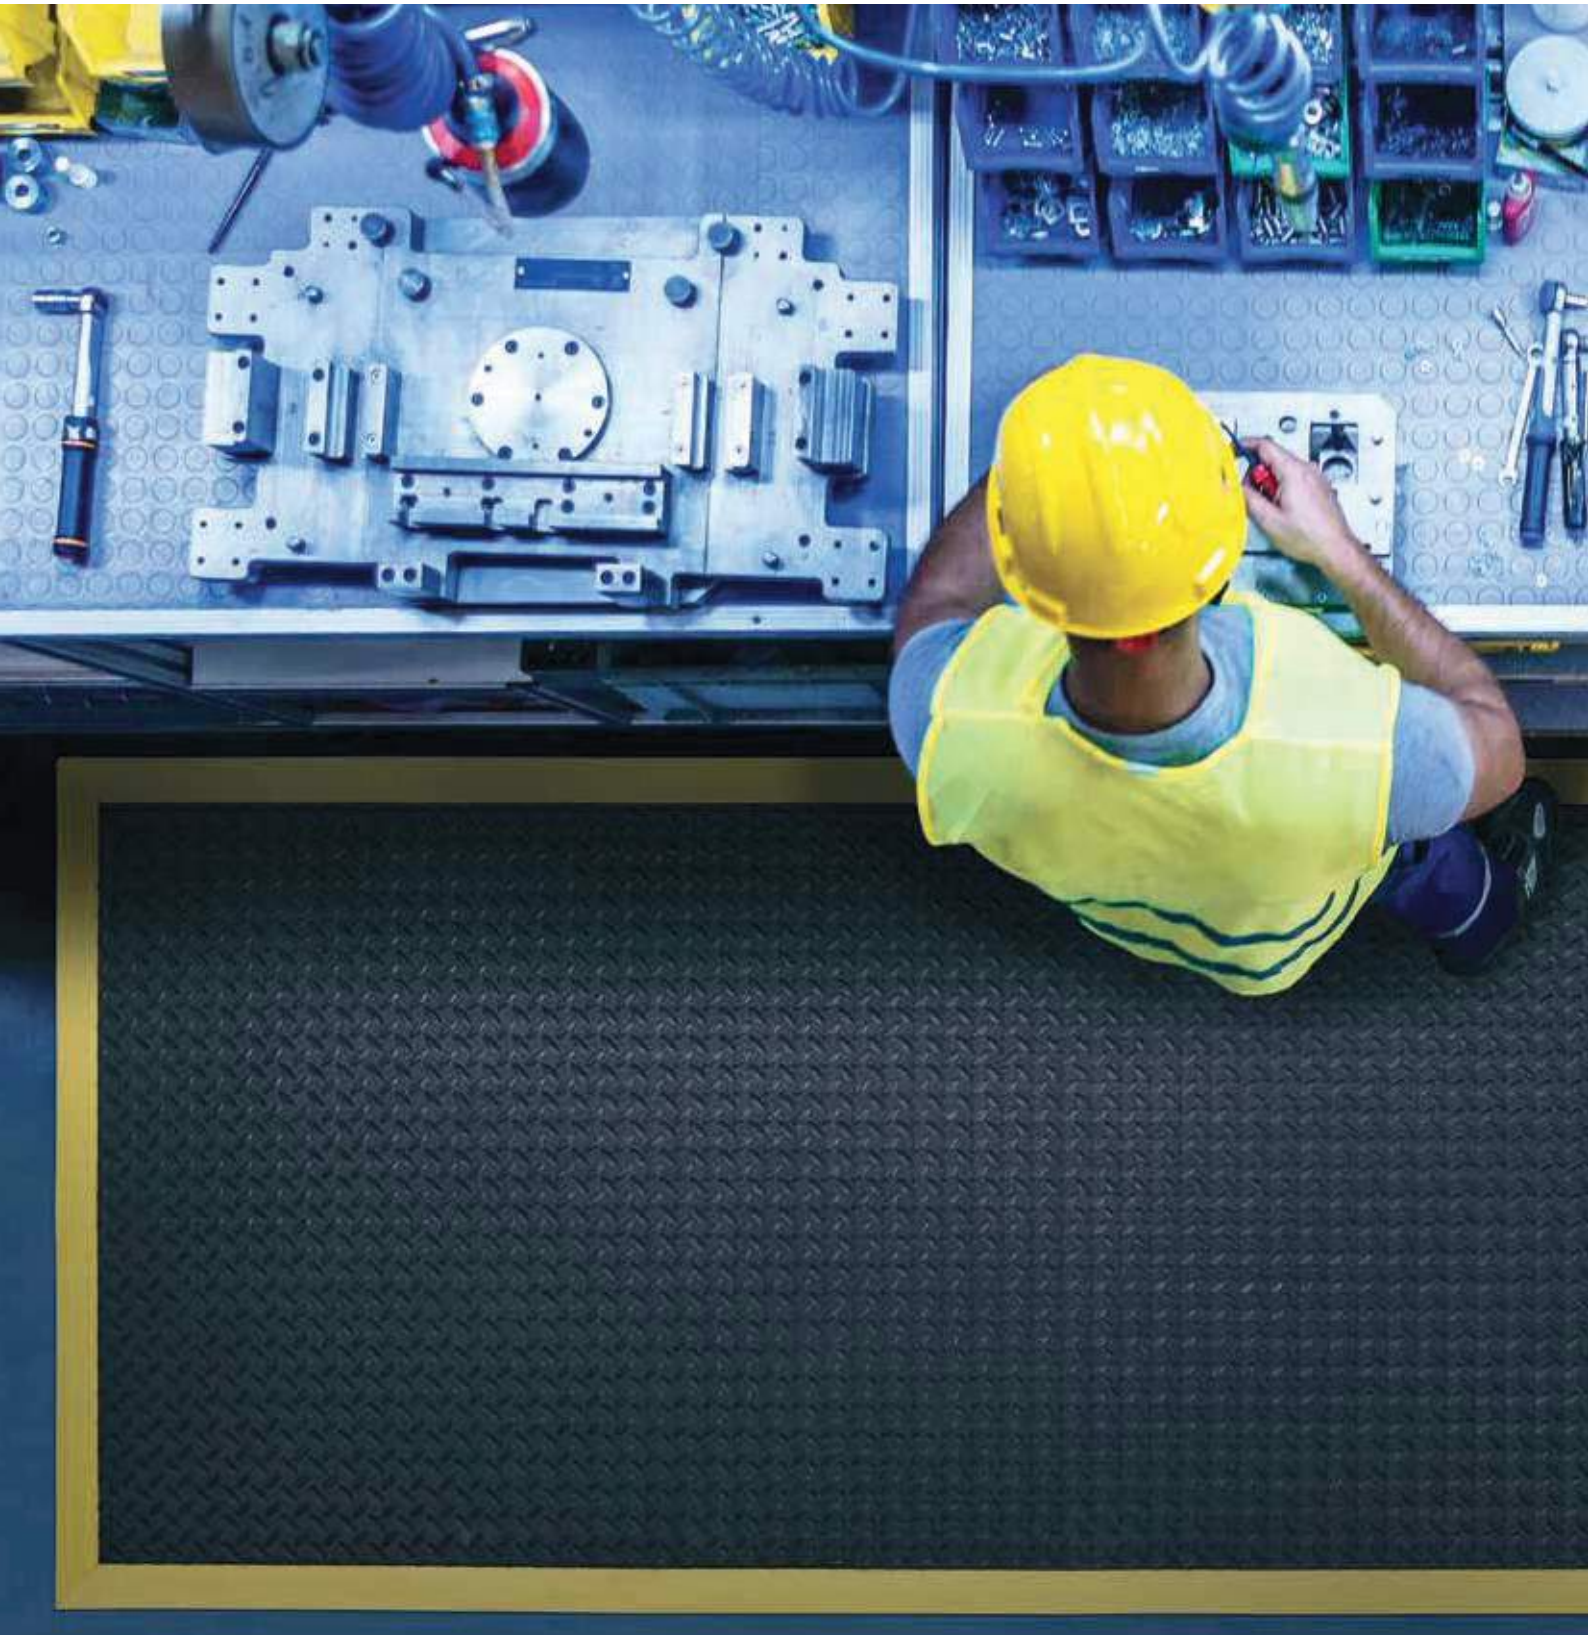

489 Cushion Flex®

Standard size anti-fatigue mats for individual workstations are loose lay and require no installation. Highly visible yellow or orange bevelled edges on all sides for added safety to minimize risk of tripping and comply with OSHA code 1910-144.

Recommended uses:

- Heavy duty - dry oily industrial environments in manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual workstations.

Specifications:

- Heavy duty 100% nitrile rubber compound
- Resistant to industrial oils and harsh chemicals
- Overall thickness: 12.7 mm
- Weight: 5.5 kg per m^2

Colours:

- Black/yellow
- Black
- Black/orange

Stock sizes:

- 91 cm x 210 cm

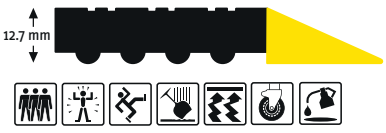

Dry Areas - Medium Duty Industrial

Dyna-Shield™

Exceptional worker comfort due to 12.7 mm thick specially formulated compound. Protective layer of exclusive Dyna-Shield™ extends service life by 50% compared to regular microcellular vinyl*.

Available with yellow borders along sides comply with OSHA code 1910-144. All 4 sides are bevelled and sealed to minimize tripping hazards.

*Supported by independent laboratory testing.

406 Crossrib Sof-Tred™

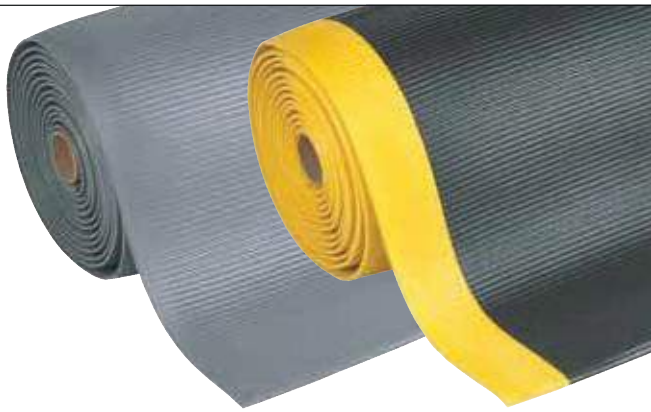

Specifications:
- Side-to-side wide ribs provide traction and easy to sweep clean
- Colours: Black/yellow, Grey
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST



413 Gripper Sof-Tred™

Specifications:
- Lengthwise corrugated rib pattern for sure footing
- Colours: Black/yellow, Grey
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST



417 Bubble Sof-Tred™

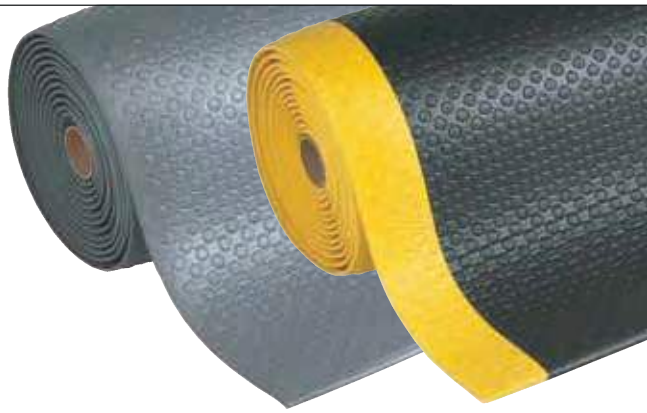

Specifications:
- Unique bubble design provides exceptional comfort
- Colours: Black/yellow, Grey
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST



419 Diamond Sof-Tred™

Specifications:
- Non-directional “Deck Plate” pattern allows freedom of movement
- Colours: Black/yellow, Grey, Black
- Thickness: 12.7 mm
- Weight: 4 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST



Dry Areas - Light/Medium Duty Industrial

Comfort

Basic worker comfort derived from a 9.4-mm thick worker platform comprised of a construction of microcellular vinyl consisting of millions of air bubbles.

All four sides are bevelled and sealed to minimize tripping hazards. Airug® Plus and Sof-Tred Plus™ versions have a higher foam density providing a better balance of comfort and support.

408 Airug® Plus

Recommended uses:
- Medium duty - dry areas
- Ribbed pattern enhances traction
- Colours: Black/yellow, Black, Grey
- Weight: 2.8 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths



409 Sof-Tred Plus™

Recommended uses:
- Medium duty - dry areas
- Pebble pattern provides non-directional traction and is easy to clean
- Colours: Black/yellow, Black, Grey
- Weight: 2.8 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths



410 Airug®

Recommended uses:
- Light duty - dry areas
- Ribbed pattern enhances traction
- Colours: Black/yellow, Black, Grey
- Weight: 2.3 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths



411 Sof-Tred™

Recommended uses:
- Light duty - dry areas
- Pebble pattern provides non-directional traction and is easy to clean
- Colours: Black/yellow, Black, Grey,
- Weight: 2.3 kg per m²

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm

Full rolls 18.3 m:
- 60 cm, 91 cm, and 122 cm widths

Custom lengths:
- 60 cm, 91 cm, and 122 cm widths



Dry Oily Areas - Heavy Duty Nitrile Mats

649 Safety Stance Solid™

High quality anti-fatigue matting for heavy duty industrial environments. Unique DiamondGrid™ surface pattern ensures sure footing to prevent slips and falls while channels drain incidental oil exposure.

Closed design ensures easy cleaning and prevents small items from falling under the mat. Remarkable worker comfort derived from a 20-mm thick resilient worker platform.

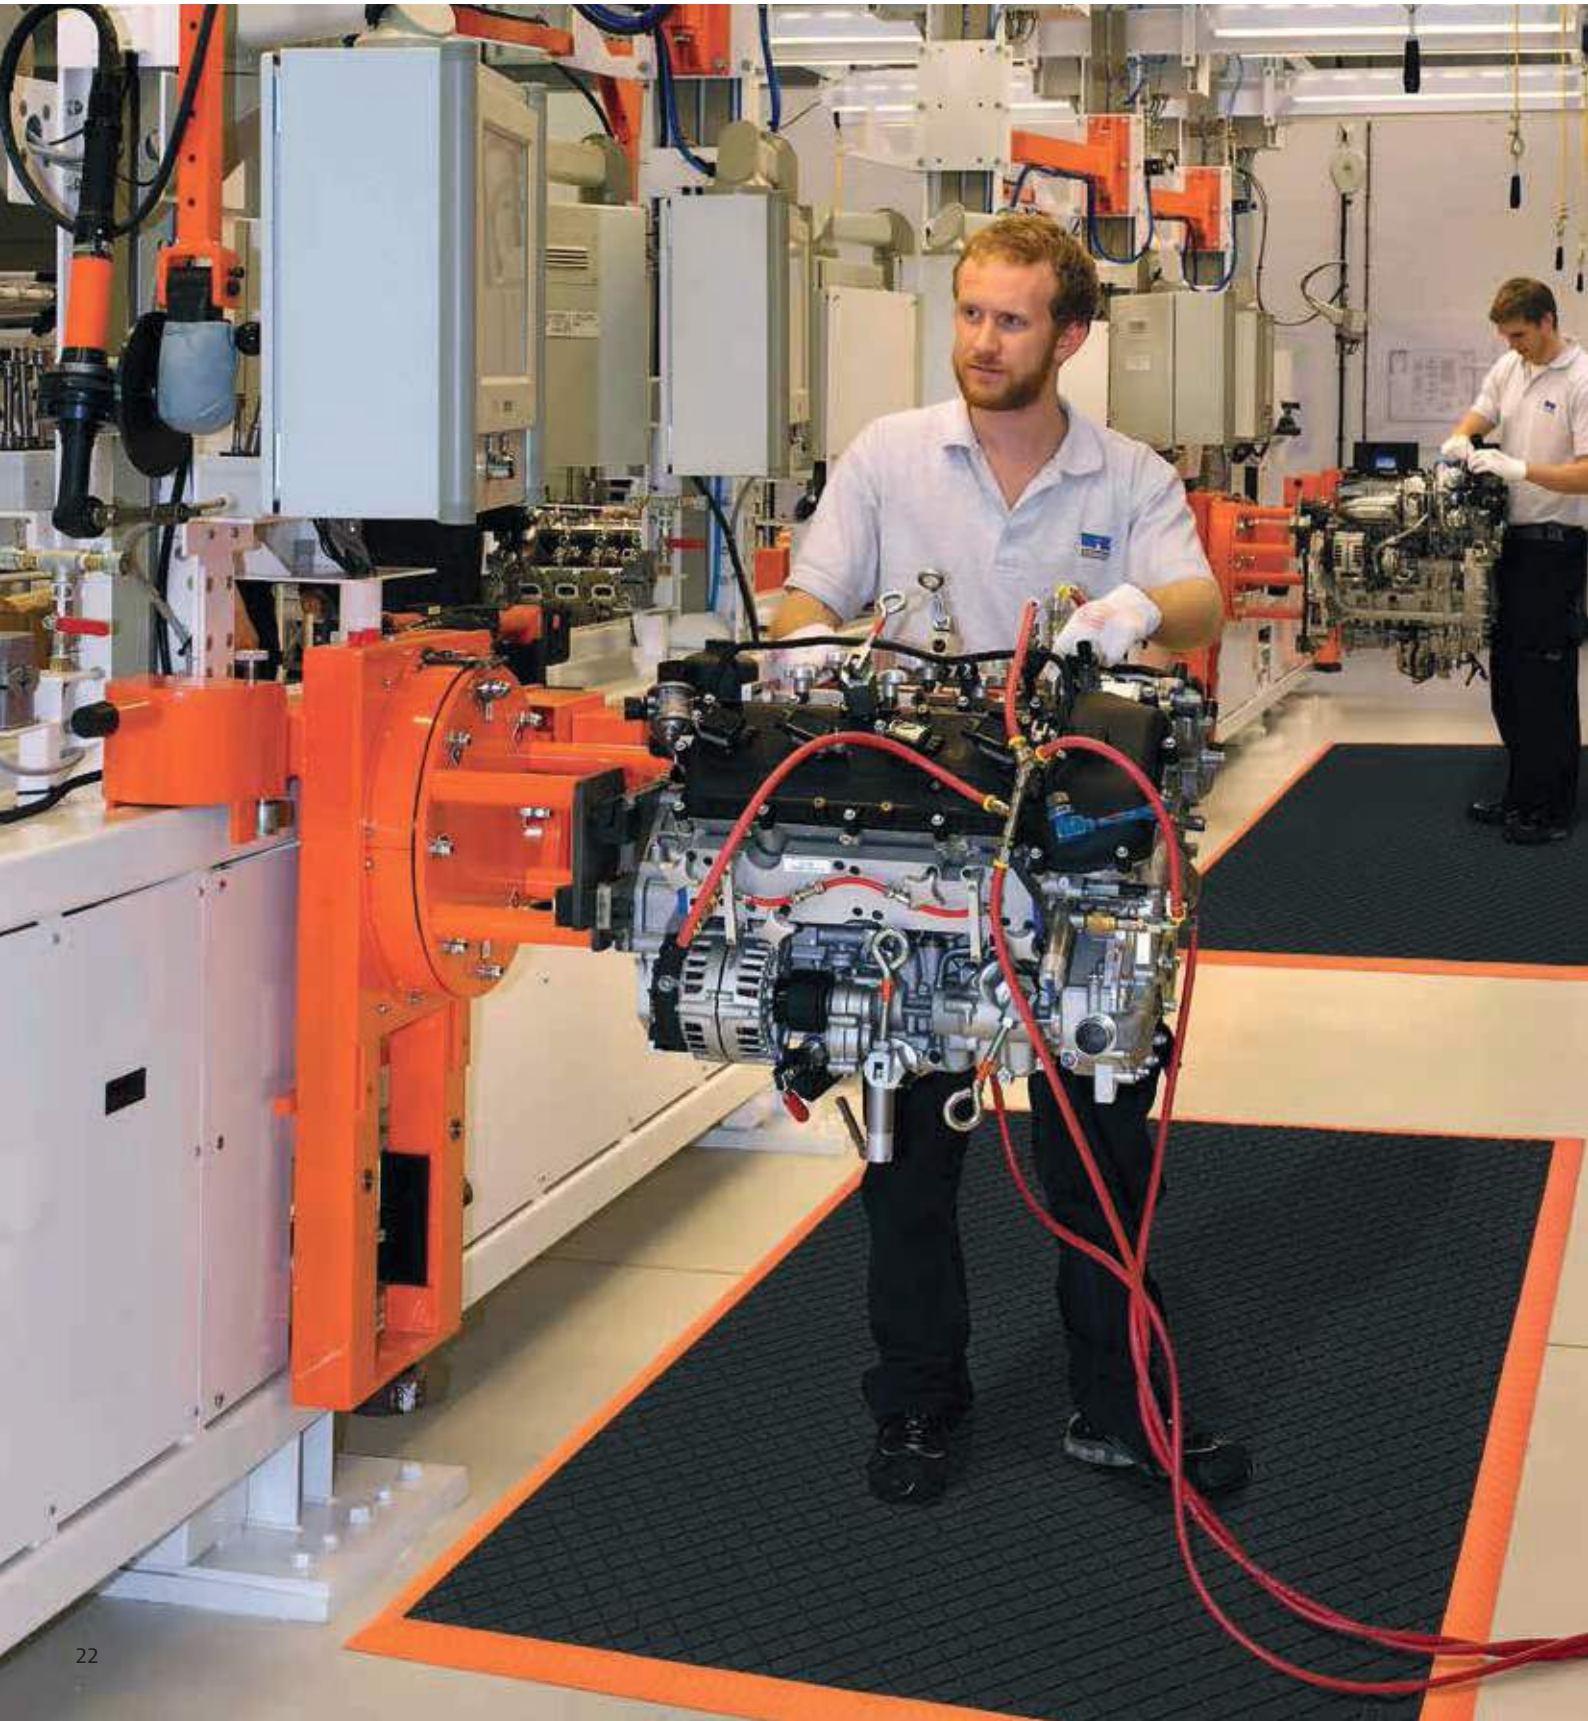

649 Safety Stance Solid™

Made of a 100% nitrile rubber compound designed to withstand industrial oils and harsh chemicals. Suited for multi-shift operations. Standard size mats for individual workstations are loose lay and require no installation. Highly visible nitrile rubber orange coloured borders included on 3 sides for added safety to prevent tripping. Non-shifting. Free of silicone therefore safe for vehicle painting facilities.

Recommended uses:

- Heavy duty - dry oily industrial environments. For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms.

Specifications:

- Heavy duty 100% nitrile rubber compound
- Resistant to industrial oils and harsh chemicals
- Orange coloured borders included on 3 sides comply with OSHA Code 1910-144
- Slip resistance R10 according to DIN51130 and BG-rule BGR181
- Overall thickness: 20 mm
- Weight: 15 kg per m^2

Colours:

- Black

Stock sizes with 3 orange borders:

- 66 cm x 102 cm
  97 cm x 163 cm
  97 cm x 315 cm

Custom sizes:

- 649 Safety Stance Solid™ Custom is available on demand in custom sizes and configurations

Accessories:

- 551 MD Ramp System™ Nitrile 5 cm wide male attachable safety ramps, orange
- 552 MD-X Ramp System™ Nitrile 15 cm male attachable safety ramps, orange

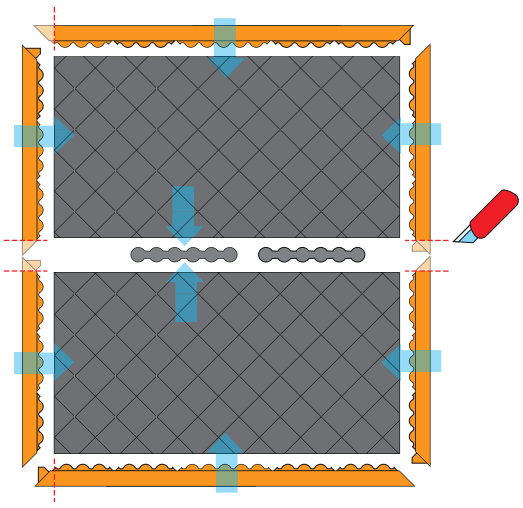

649 Safety Stance Solid™ Custom
Custom sizes. Calculated on square meter basis.

Dry Areas - Heavy Duty Industrial

Diamond Flex™ Series

High quality anti-fatigue individual workstation mat for heavy duty industrial environments. Standard size mats for individual workstations are loose lay and require no installation.

The 18.4 mm thick platform elevates and insulates the worker from the hard ground while the bulleted domes underneath allow the mat to bend and “flex” with every movement.

Recommended uses:
- Heavy duty - dry industrial environments in manufacturing plants, production and assembly lines

Specifications:
- Heavy duty rubber compound
- Overall thickness: 18.4 mm
- Weight: 14.6 kg per mat
- Slip resistance rating R10 according to DIN 51130
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Stock sizes with black or yellow borders:
- 101 cm x 160 cm with 4 bevels
  96 cm x 160 cm with 3 bevels

546 Diamond Flex™

Specifications:
- 100% natural rubber compound
- General purpose applications

547 Diamond Flex™ Nitrile

Specifications:
- 100% nitrile rubber compound
- Resistant to most industrial oils

548 Diamond Flex™ ESD

Specifications:
- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Optional grounding cord

646 Diamond Flex Nitrile FR

Specifications:
- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Dry Areas - Heavy Duty Modular Rubber Mats

Cushion Ease Solid™ Series

Heavy duty rubber tiles of 91 cm x 91 cm can be easily assembled for coverage of large areas or individual workstations, wall-to-wall or as islands.

Ergonomic benefit derived from a 19-mm thick worker platform with a closed anti-slip pebble structure surface for maximum anti-fatigue comfort in dry industrial environments.

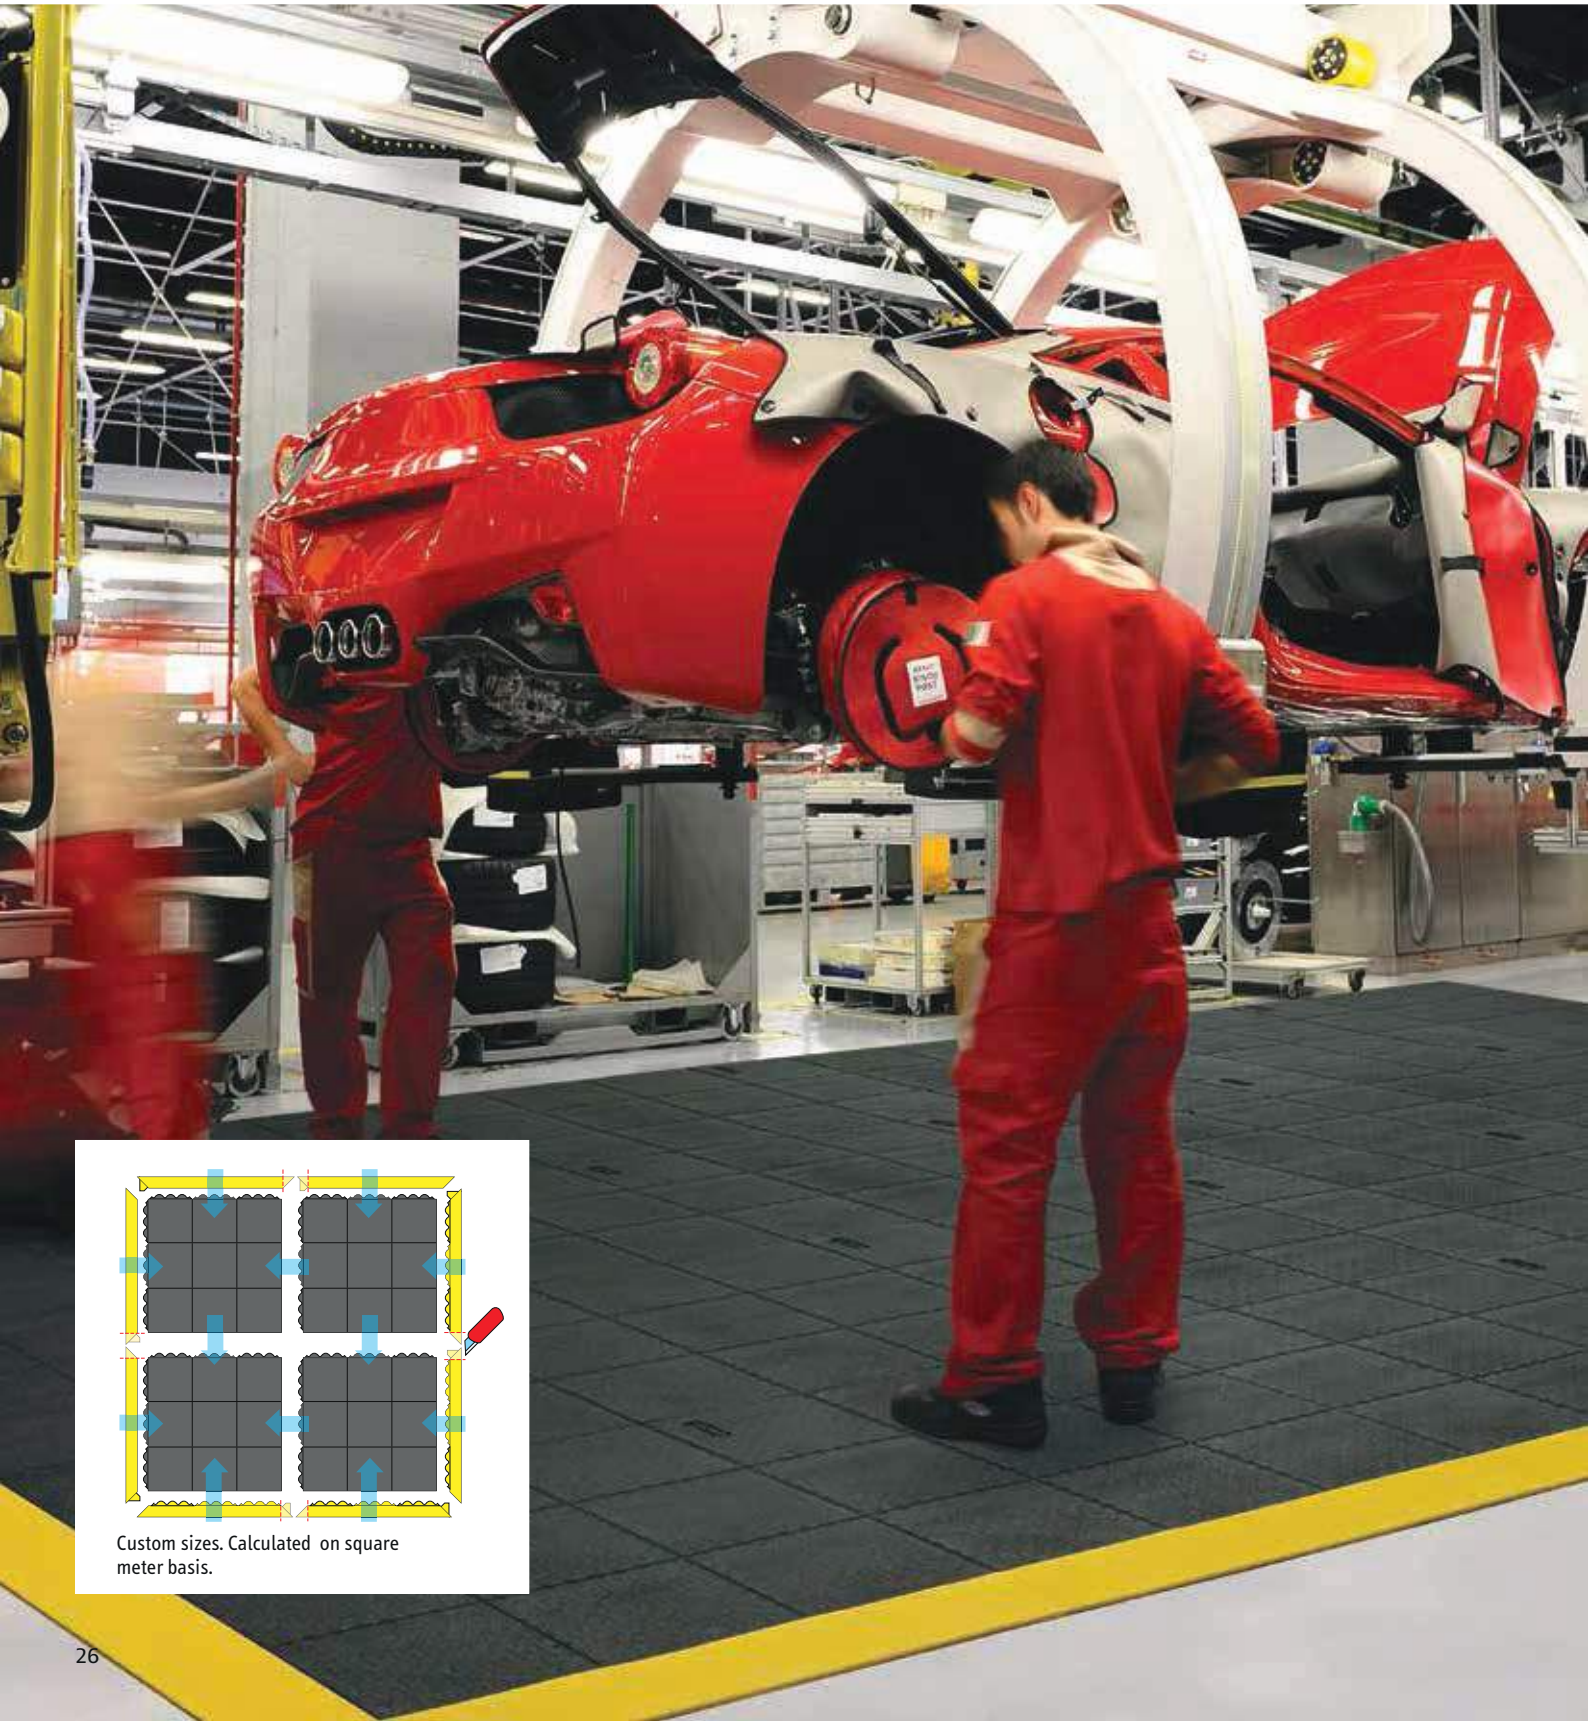

Custom sizes. Calculated on square meter basis.

Recommended uses:
- Heavy duty - dry industrial environments in manufacturing plants, production and assembly lines

Specifications:
- Heavy duty rubber compound
- Overall thickness: 19 mm
- Weight: 12.7 kg per mat

Accessories:
- 551 MD Ramp System™ Nitrile, male and female attachable bevels 91 x 5 cm, black or yellow
- 552 MD-X Ramp System™ Nitrile, male and female attachable bevels 91 x 15 cm, black or yellow - broader size to allow easier access for wheelchairs and light carts

556 Cushion Ease Solid™

- 100% natural rubber compound
- General purpose applications

656S Cushion Ease Solid™ Nitrile

- 100% nitrile rubber compound
- Resistant to most industrial oils

656SFR Cushion Ease Solid™ Nitrile FR

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

558 Cushion Ease Solid™ ESD

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Optional grounding cord

661 Cushion Ease Solid™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω

856SFR Cushion Ease Solid™ Nitrile GSII® FR

- 100% nitrile rubber compound.
- With abrasive Grip Step® coating for extra adherence in extremely slippery areas

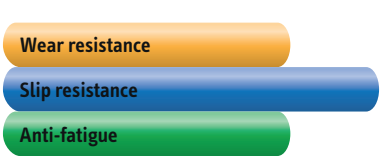

Dry Areas - Heavy Duty Modular Rubber Mats

De-Flex™ Series

Extremely comfortable heavy duty anti-fatigue matting system with popular diamond plate traction surface that can be easily assembled for coverage of large areas or individual workstation mats.

These 45 cm x 45 cm modular rubber tiles are designed with a universal double-locking system on all sides to ensure an extra strong yet seamless connection for fast installation.

Custom sizes. Calculated on square meter basis.

Recommended uses:
- Heavy duty - dry industrial areas

Specifications:
- Heavy duty rubber compound
- Overall thickness: 19 mm
- Weight: 3.3 kg per mat
- Slip resistance rating R10 according to DIN 51130
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Stock sizes:
- 45 cm x 45 cm

Accessories:
- Nitrile attachable bevel 91 cm x 15 cm, black or yellow

570 De-Flex™

- 100% natural rubber compound
- General purpose applications

572 De-Flex™ Nitrile

- 100% nitrile rubber compound
- Resistant to most industrial oils

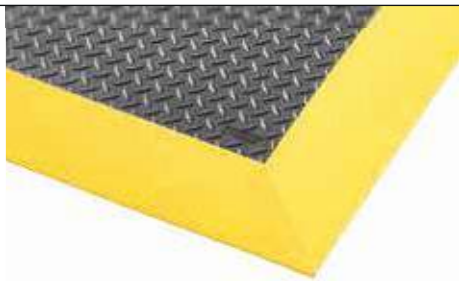

573 De-Flex™ ESD

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Optional grounding cord

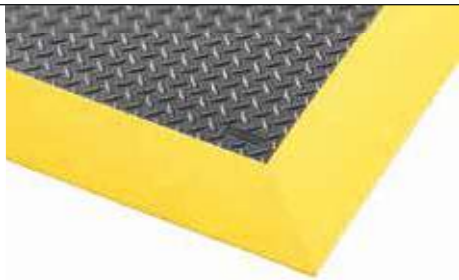

574 De-Flex™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Optional grounding cord
- Fire classification Bfl-S1 tested according to EN 13501-1

575 De-Flex™ Nitrile FR

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding area

Dry Areas - Heavy Duty Modular Rubber Mats

Skywalker HD™ Series

Heavy duty rubber tiles of 91 cm x 91 cm can be easily assembled for coverage of large areas or individual workstations.

Ergonomic benefit derived from a 13-mm thick worker platform with a bubble pattern for maximum fatigue relief in dry industrial environments.

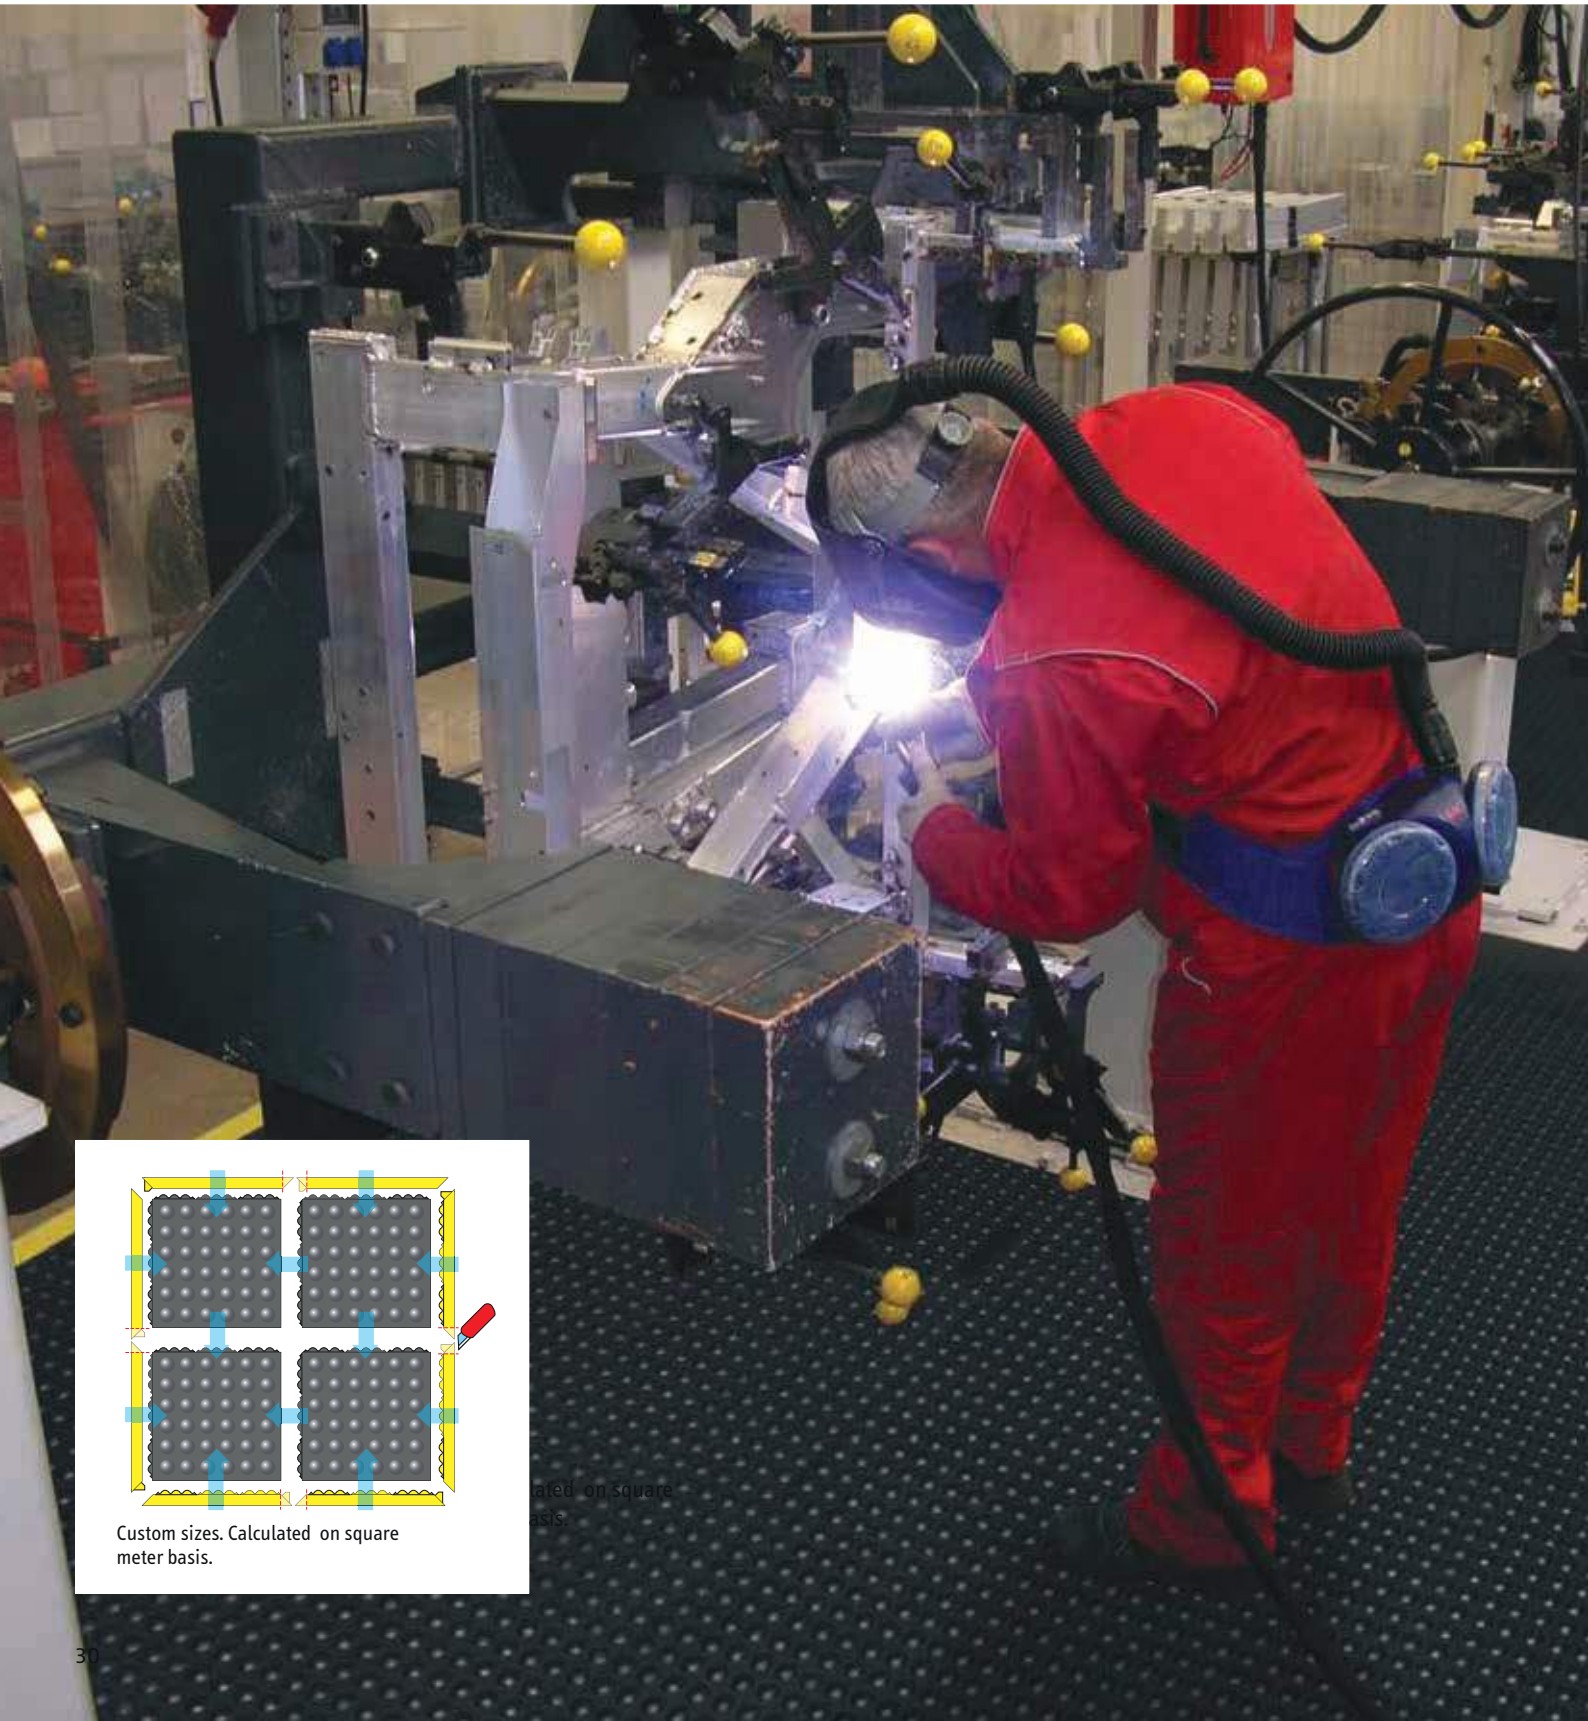

Custom sizes. Calculated on square meter basis.

Recommended uses:
- Heavy duty - dry industrial environments. For placement in manufacturing plants, production lines, assembly lines, metal working, fabrication, individual workstations and custom work platforms.

Specifications:
- Heavy duty rubber compound
- Overall thickness: 13 mm
- Weight: 10 kg per mat
- Slip resistance rating R9 according to DIN 51130

Stock sizes:
- 91 cm x 91 cm

Accessories:
- 461 SkywalkerHD™ Safety Ramp Nitrile, attachable bevel 91 cm x 5 cm, black or yellow
- 434 Skywalker HD i-Curve™ ESD Nitrile FR 91 cm – 45 degree inner curve
- 444 Skywalker HD o-Curve™ ESD Nitrile FR 91 cm – 22.5 degree outer curve
- 469 SkywalkerHD Safety Line™ Nitrile for marking borders, walkways, zones and safety barriers.

460 Skywalker HD™

- 100% natural rubber compound
- General purpose applications

462 Skywalker HD™ Nitrile

- 100% nitrile rubber compound
- Resistant to most industrial oils

463 Skywalker HD™ ESD

- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω

464 Skywalker HD™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω

465 Skywalker HD™ Nitrile FR

- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Dry Areas - Heavy Duty Modular Rubber Mats

Skywalker HD™ Accessories

The Skywalker HD™ accessories maintain the same feel as the Skywalker HD™ mats with an ergonomic bubble pattern and matching rubber compounds.

This seamless integration allows for unlimited configuration possibilities.

469 Skywalker HD Safety Line™

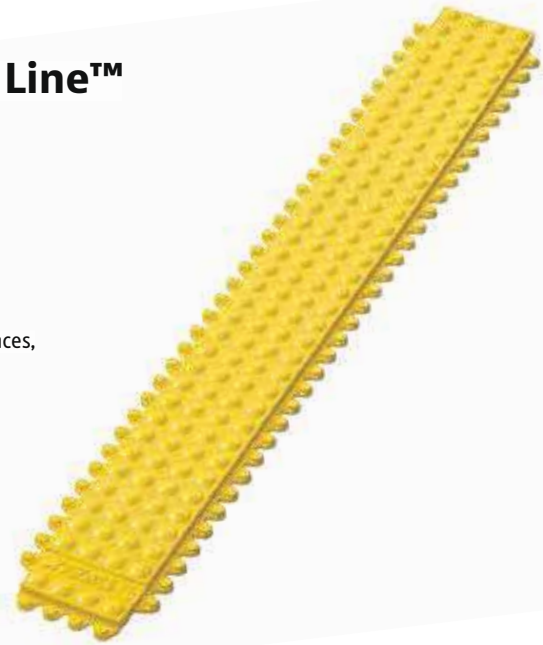

Recommended uses:
- Heavy duty - dry areas

Specifications:

- Heavy duty rubber compound
- Overall thickness: 13 mm
- Slip resistance rating R9 according to DIN 51130
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals
- Yellow safety line for marking borders, walkways, zones and safety barriers
- 100% nitrile rubber compound
- Resistant to most industrial oils

Colours:
- Yellow

Stock sizes:
- 10 cm x 91 cm

434 Skywalker HD i-Curve™ ESD Nitrile FR

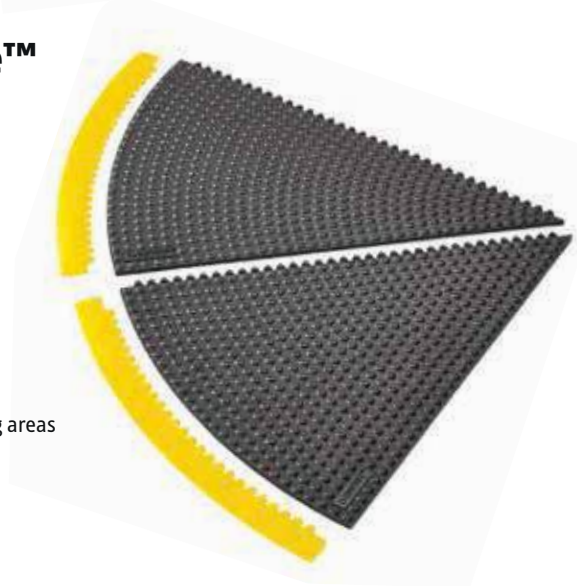

Specifications:
- 91 cm – 45 degree inner curve
- 431 Skywalker HD™ i-Curve Safety Ramp Nitrile male attachable bevels, available in black or yellow
- Weight: 4.3 kg per mat
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Static dissipative nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Colours:
- Black

444 Skywalker HD o-Curve™ ESD Nitrile FR

Specifications:
- 91 cm – 22.5 degree outer curve
- 441 Skywalker HD™ o-Curve Safety Ramp Nitrile male attachable bevels, available in black or yellow
- Weight: 6.4 kg per mat
- Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Static dissipative nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Colours:
- Black

Dry Areas - Medium Duty Rubber Foam Mats

425 Posture Mat Series

Exceptionally soft and comfortable anti-fatigue mats for standing workers in primarily static positions with limited lateral movement making it ideal for sit-stand desks and individual standing workstations.

The rebound of the foam results in an energizing bounce effect that stimulates automatic balance checks to improve posture and constant micro movements to maintain blood flow.

426 Posture Mat™

The ideal anti-fatigue mat for adjustable desks that combines style and comfort primarily for stationary positions making it ideal for sit-stand desks and standing workstations. A built-in handle makes it easy to carry or hang up when not in use.

Recommended uses:
- Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, service counters, cashiers

Specifications:
- PVC top surface attached to a microcellular vinyl base with a crumb rubber backing
- Attractive textured pattern fits well in office environments
- Overall thickness: 18 mm
- Weight: 3.3 kg per m²
- Bevelled edges on all four sides to minimize risk of tripping

Colours:
- Grey

Stock sizes :
- 52 c m x 70 cm
  51 cm x 99 cm

425 Posture Mat Classic™

Made from a durable closed cell foam that is reputed for its ultimate comfort and longevity properties, the naturally resilient material moulds to the foot to spread weight and reduce pressure points from the hard floor underneath. All four sides have bevelled edges to minimize tripping hazards. Loose lay with no installation required.

Recommended uses:
- Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers

Specifications:
- Durable closed cell foam blend rubberized sponge
- Textured basket weave surface for grip
- Overall thickness: 19 mm
- Weight: 5.8 kg per m²
- Bevelled edges on all four sides to minimize risk of tripping

Colours:
- Black

Stock sizes:
- 51 cm x 61 cm
  61 cm x 182 cm
  91 cm x 102 cm
  91 cm x 152 cm

Dry Areas - Medium Duty Polyurethane Mats

Skywalker® PUR Series

High quality polyurethane foam anti-fatigue mats are reputed for their ultimate comfort in stationary standing positions. Its key characteristic of high thermal insulation performance is owed to a uniform closed cell structure wherein gas remains trapped. Integral skin adds to the compression force deflection properties (>120 according to ASTM 3574C), provides resistance to wear and is non-porous.

450 Skywalker® PUR

Specifications:
- High quality polyurethane foam for general purpose applications
- Ergonomic bubble surface provides sure footing and fatigue relief
- Overall thickness: 14 mm
- Weight: 4.8 kg per m^2
- Slip resistance rating R11

Colours:
- Grey

Stock sizes:
- 65 cm x 95 cm
  65 cm x 140 cm
  65 cm x 185 cm
  95 cm x 125 cm
  95 cm x 155 cm
  95 cm x 185 cm

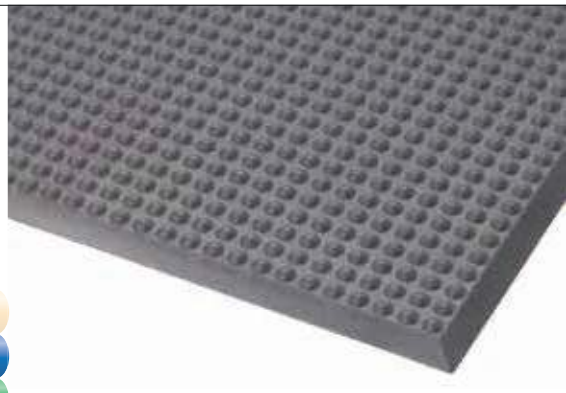

451 Skywalker® II PUR

Specifications:
- High quality polyurethane foam for general purpose applications
- Pebble surface for sure footing and allows freedom of movement
- Overall thickness: 14 mm
- Weight: 4.8 kg per m^2
- Slip resistance rating R11

Colours:
- Grey

Stock sizes:
- 65 cm x 90 cm
  65 cm x 135 cm
  65 cm x 175 cm
  90 cm x 125 cm
  90 cm x 155 cm
  90 cm x 185 cm

452 Skywalker® PUR ESD

Specifications:
- Static dissipative polyurethane foam
- Ergonomic bubble surface provides traction and fatigue relief
- Overall thickness: 14 mm
- Weight: 4.8 kg per m^2
- Slip resistance rating R11
- Meets IEC61340-4-1 (category DIF) measured resistance
  Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω

Colours:
- Black

Stock sizes:
- 65 cm x 95 cm
  65 cm x 140 cm
  65 cm x 185 cm
  95 cm x 125 cm
  95 cm x 155 cm
  95 cm x 185 cm

453 Skywalker® II PUR ESD

Specifications:
- Static dissipative polyurethane foam
- Pebble surface for sure footing and allows freedom of movement
- Overall thickness: 14 mm
- Weight: 4.8 kg per m^2
- Slip resistance rating R11
- Meets IEC61340-4-1 (category DIF) measured resistance
  Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω

Colours:
- Black

Stock sizes:
- 65 cm x 90 cm
  65 cm x 135 cm
  65 cm x 175 cm
  90 cm x 125 cm
  90 cm x 155 cm
  90 cm x 185 cm

Dry Areas - Medium Duty Rubber Standalone Mats

Skystep™ Series

Ergonomically and economically engineered, the Skystep™ utilizes the power of air. Skystep™ is designed to suction to the ground to prevent the mat from shifting while trapping air in its chambers. These air pockets combined with the resiliency of the rubber create an ultimate cushioning effect while keeping the mat lightweight. Integrated bevelled edges on all four sides to prevent tripping on the mat. Loose lay with no installation required. Slip resistance rating R9 according to DIN 51130 and BG-rule BGR181.

455 Skystep™

Specifications:
- 100% natural rubber compound
- General purpose applications
- Overall thickness: 13 mm
- Weight: 10 kg per m^2
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:
- Black

Stock sizes:
- 60 cm x 90 cm
  90 cm x 120 cm
  90 cm x 150 cm

456 Skystep™ Nitrile

Specifications:
- 100% nitrile rubber compound
- Resistant to most industrial oils
- Overall thickness: 13 mm
- Weight: 10 kg per m^2
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:
- Black

Stock sizes:
- 60 cm x 90 cm
  90 cm x 120 cm
  90 cm x 150 cm

457 Skystep™ ESD

Specifications:
- Static dissipative natural rubber compound
- Meets IEC61340-4-1 (category DIF) measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω
- Optional grounding cord
- Overall thickness: 13 mm
- Weight: 10 kg per m^2
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals.

Colours:
- Black

Stock sizes:
- 60 cm x 90 cm
  90 cm x 120 cm
  90 cm x 150 cm

Dry Areas - Medium Duty Rubber Standalone Mats

526G Sani-Flex™

Specially designed for the lab industry, Sani-Flex™ anti-fatigue matting provides the optimum combination of comfort, anti-slip surface, quality and durability, as well as oil/grease and chemical resistance.

Its smooth surface and rounded off edges make it easy to clean. Small sizes are perfect for stationary working areas as well as making the mats light and easy to handle.

526G Sani-Flex™

Recommended uses:

- For placement in laboratories, pharmacies, clinics, as well as manufacturing plants, assembly lines, picking, packing and logistics warehouses, individual work stations.

Specifications:

- Closed anti-slip gritted structure surface
- Superb anti-fatigue properties due to its unique design underneath
- 100% natural rubber compound, designed to yield a long service life

Colours:

- Grey

Stock sizes:

- 46 cm x 61 cm
  61 cm x 91 cm

Workplace Solutions for Wet Areas

Slip and fall prevention is usually the main concern in wet and oily working environments. Slips and falls are responsible for 20 - 30% of the accidents which cause long-term interruption of work. Loss of productivity is often an unfortunate side effect with nearly 30% of same-level falls resulting in more than 21 workdays lost.

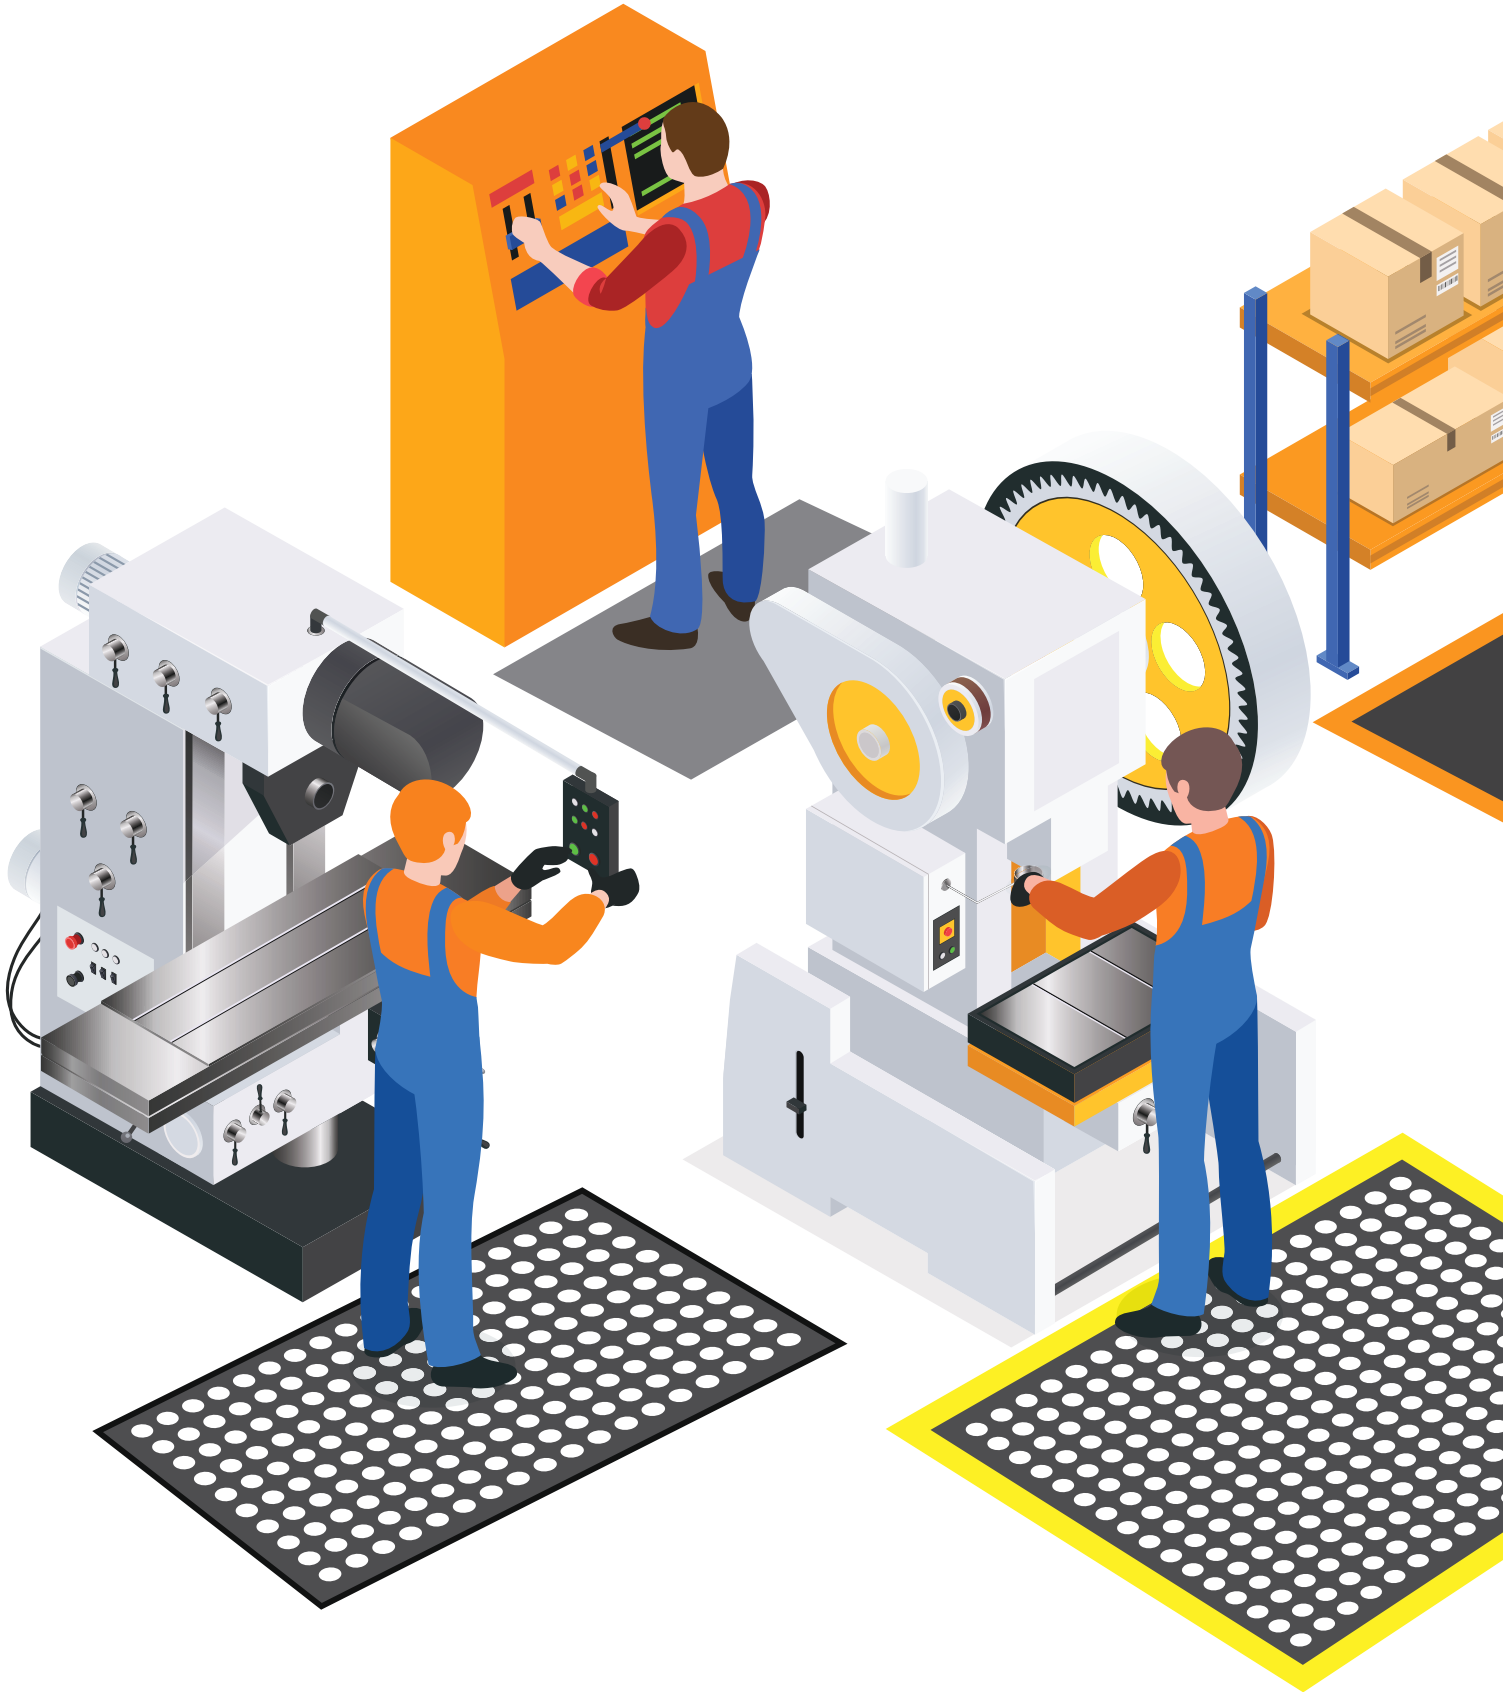

The four main causes of slip and trip accidents are:

- slippery/wet surfaces caused by water, oil and other fluids;
- slippery surfaces caused by dry or dusty floor contamination, such as sawdust or other debris;
- obstructions, both temporary and permanent;
- uneven surfaces and changes of level, such as unmarked ramps.

Floors can become dangerously slippery when they are wet or exposed to oil, water, grease, and soap from cleaning solutions. Floors can also become slippery due to dry or dusty floor contamination, such as sawdust. Bits of gravel and dirt are commonly called 'boulder dust' because they act as miniature ball bearings when caught between a hard floor surface and a smooth shoe sole.

Safety matting increases traction with anti-slip surface patterns and remove wet or dry debris through large drainage holes to keep the surface clean and clear.

However, data from the NIOSH on reported workplace accidents also cited overexertion and repetitive work as a contributing factor to long-term absenteeism. In fact, this cause was almost double the number of reported incidents. Combined, these two factors are the largest cause of non-fatal injury and illness cases involving days away from work.

Source: NIOSH is the federal agency responsible for conducting research and making recommendations to prevent work-related injury, illness, and fatalities.

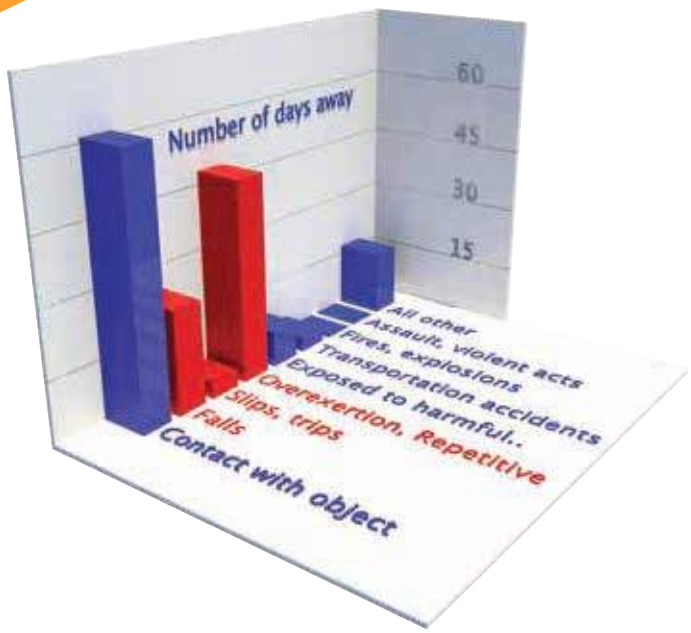

Wet Areas - Heavy Duty Nitrile Mats

549 Safety Stance™

Drainage holes and raised studs provide aeration and allow fluids and debris to fall through, leaving a dry and tidy top surface.

High quality anti-fatigue matting for use in areas where there can be frequent oil spilling.

549 Safety Stance™

Aggressive slip resistant surface. Cleaning with detergent and water-jet is recommended for extended service life. Standard size mats are loose lay and require no installation. Non-shifting. Free of silicone therefore safe for vehicle painting facilities.

Recommended uses:
- Heavy duty – wet/oily industrial environments
- For placement in manufacturing plants, production lines, assembly lines, CNC machines, metal working for individual workstations and custom work platforms.

Specifications:
- Heavy duty 100% nitrile rubber compound
- Resistant to industrial oils and harsh chemicals
- Orange coloured borders included on 3 sides comply with OSHA Code 1910-144
- Overall thickness: 22 mm
- Weight: 13 kg per m^2
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Colours:
- Black

Stock sizes with 3 orange borders:
- 66 cm x 102 cm
- 97 cm x 163 cm
- 97 cm x 315 cm

Custom sizes:
- 549 Safety Stance™ Custom is available on demand in custom sizes and configurations

Accessories:
- 551 MD Ramp System™ Nitrile 5 cm wide male attachable safety ramps, orange
- 552 MD-X Ramp System™ Nitrile 15 cm wide male attachable safety ramps, orange

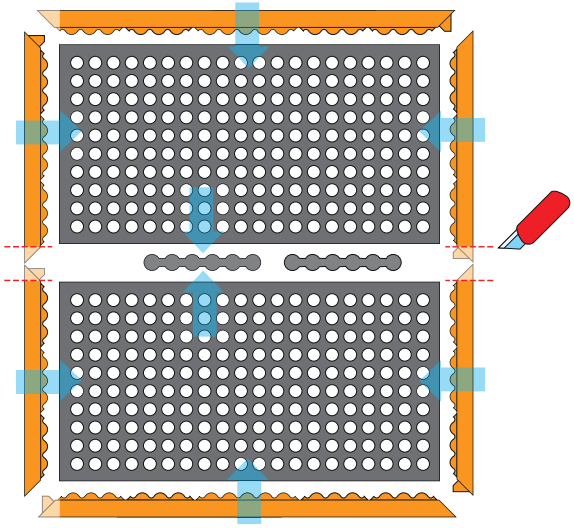

549 Safety Stance Custom
Custom sizes. Calculated on square meter basis.

Wet/Dry Areas - Modular Rubber Mats

Cushion Ease™ Series

Modular rubber anti-fatigue mats with holes for excellent drainage and aeration leaving a dry, clean work area. Square snap-together units of 91 cm x 91 cm that can be assembled effortlessly and laid out from wall-to-wall or as islands in any direction or shape. Compatible with patented MD Ramp System™ for smart safety bevelling solutions; allow out and inside corners. Superb anti-fatigue properties due to its unique design underneath and high quality resilient rubber compounds. Designed to yield a long service life.

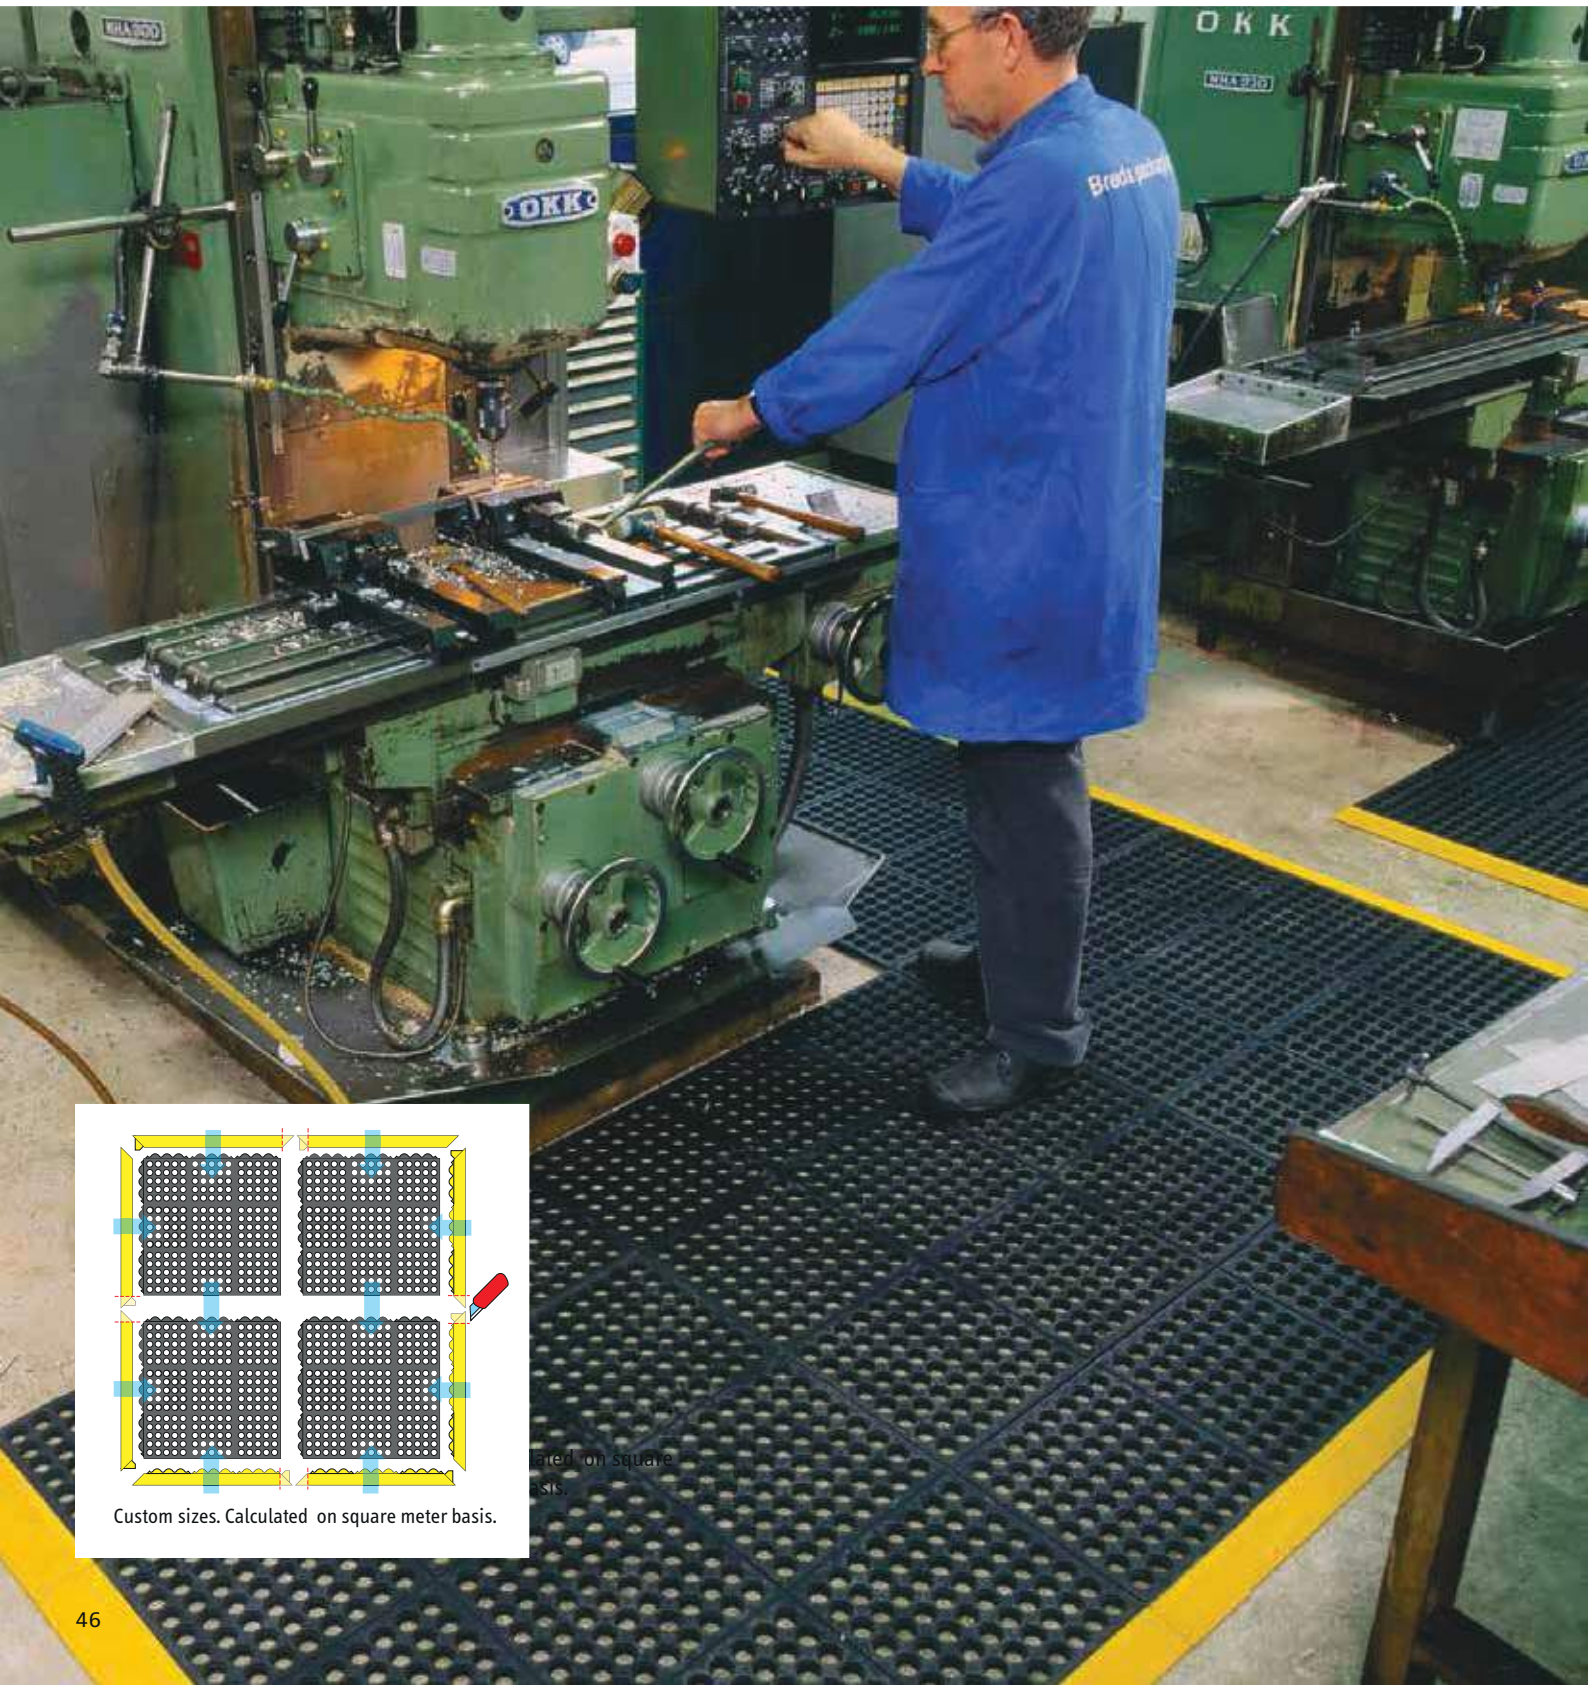

Custom sizes. Calculated on square meter basis.

Cushion Ease™ Series

Recommended uses:
- Heavy duty - wet areas. In manufacturing plants, production lines, assembly lines, CNC machines, metal working, fabrication

Specifications:
- Heavy duty rubber compound
- Overall thickness: 19 mm
- Weight: 10.8 kg per mat
- Free of DOP, free of DMF, free of ozone depleting substances, free of silicone and free of heavy metals

Stock sizes:
- 91 cm x 91 cm

Accessories:
- 551 MD Ramp System™ Nitrile, male and female attachable bevels 91 x 5 cm, black or yellow.
- 552 MD-X Ramp System™ Nitrile, male and female attachable bevels 91 x 15 cm, black or yellow

550 Cushion Ease™

Specifications:
- 100% natural rubber compound
- General purpose applications

650S Cushion Ease™ Nitrile

Specifications:
- 100% nitrile rubber compound
- Resistant to most industrial oils

650SFR Cushion Ease™ Nitrile FR

Specifications:
- 100% nitrile rubber compound
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils
- Suitable for welding areas

850SFR Cushion Ease™ Nitrile GSII® FR

Specifications:
- 100% nitrile rubber compound
- With abrasive Grip Step® coating for extra adherence in extremely slippery areas
- Slip resistance R13 according to DIN 51130
- Fire classification Bfl-S1 tested according to EN 13501-1
- Resistant to most industrial oils and suitable for welding areas

Wet/Dry Areas - Rubber Working Platforms

Rubber Duckboards

Rubber duckboards provide a comfortable and safe working platform in wet areas with its aggressive slip resistant surface. Large holes and raised studs allow fluids in wet areas or debris in dry areas to fall through leaving the surface clear. Cleaning with detergent and water jet is recommended for extended service life.

563 Sanitop Deluxe™

Safety and comfort unite in this product. Ergonomic benefit derived from a 20-mm thick worker platform. Straight edges allow coverage of any area through linking the mats lengthwise or side by side, held together by connectors.

Specifications:
- 100% natural rubber compound for general purpose applications
- Overall thickness: 20 mm
- Weight: 12.3 kg per m²

Recommended uses:
- Heavy duty applications

Stock sizes:
- 91 cm x 152 cm

Accessories:
- Connectors for widthwise or lengthwise expansion

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

563 Sanitop Deluxe™ is also available in a 75% nitrile rubber compound for food production and food service applications (page 77).

562 Sanitop™

Provides basic comfort and traction in wet areas with large drainage holes and raised studs for aeration and to allow fluids and debris to fall through, leaving the surface clear. Moulded bevelled edges on all 4 sides to prevent tripping and allow cart access.

Specifications:
- 100% natural rubber compound for general purpose applications
- Overall thickness: 12.7 mm
- Weight: 8 kg per m²

Recommended uses:
- Medium duty applications

Stock sizes:
- 91 cm x 152 cm
  91 cm x 297 cm
  91 cm x 594 cm

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

562 Sanitop™ is also available in a 75% nitrile rubber compound for food production and food service applications (page 79).

567 Superflow® XT Nitrile

Oil resistant reversible anti-slip mat is remarkably comfortable and usable on both sides for extended life. Its perforated woven surface is slip resistant while allowing instant evacuation of liquids in wet areas. Low profile for easy cart access and lightweight to facilitate lifting and cleaning.

Specifications:
- 100% nitrile rubber compound is resistant to most industrial oils
- Overall thickness 8.5 mm
- Weight 8.8 kg per m²

Recommended uses:
- Medium duty applications

Stock sizes:
- 60 cm x 90 cm
  91 cm x 152 cm
  122 cm x 183 cm

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

T23 Multi Mat II®

Reversible. Drainage holes keep the surface clear. Raised studs provide grip and aeration.

Specifications:
- 100% natural rubber compound for general purpose applications
- Overall thickness: 9.5 mm
- Weight: 9.9 kg per m²

Full rolls 9.75 m:
- 60 cm, 91 cm and 122 cm widths

Stock sizes:
- 60 cm x 122 cm
  60 cm x 244 cm
  91 cm x 122 cm
  91 cm x 244 cm
  122 cm x 122 cm
  122 cm x 244 cm

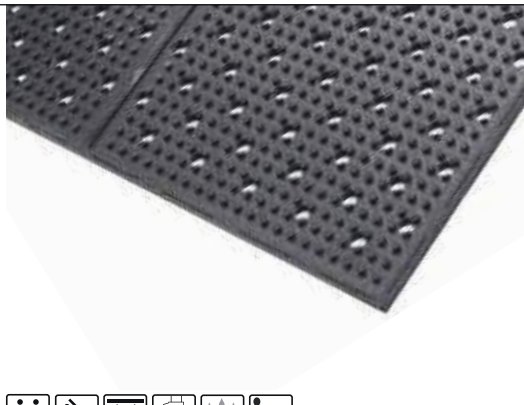

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST SUPERIOR

Wet Areas - Anti-Slip Solutions

Grid Matting

The anti-slip base and anti-slip surface create a healthier and safer environment in wet or oily areas. The PVC vinyl compound resists chemicals, oil and grease.

Easy to install and relocate. Easy to clean and requires little to no maintenance. Suitable for heavy duty use and will not flatten over time.

537 Flexdek™

Industrial grade welded duckboard design that creates an elevated platform for safety and offers basic fatigue relief. Open grid mat construction provides excellent drainage of fluids in all directions.

Recommended uses:
- Heavy duty - wet, dry or oily industrial areas

Specifications:
- Industrial grade extruded PVC compound in a welded grid design
- Oil and grease resistant
- Overall thickness: 12 mm
- Weight: 7.5 kg per m²
- Slip resistance R10 tested according to DIN51130 and BG-rule BGR181

Colours:
- Black, Black/yellow

Full rolls 10 m:
- 60 cm, 91 cm and 122 cm wide

Custom lengths:
- 60 cm, 91 cm and 122 cm widths per linear meter

Accessories:
- Connector clips available for widthwise/lengthwise expansion
- 90-degree connections

539 Gripwalker™

The wave design creates a slip-resistant surface that increases traction on wet and slippery floors. Anti-bacterially treated vinyl prevents growth of fungi or bacteria. Open structure for easy draining where dependable sure footing is essential.

Recommended uses:
- Heavy duty - wet, dry or oily industrial areas

Specifications:
- Industrial grade extruded PVC in a wave design, anti-bacterially treated
- Oil and grease resistant
- Overall thickness: 11 mm
- Weight: 8 kg per m²
- Slip resistance R10 tested according to DIN51130 and BG-rule BGR181

Colours:
- Grey

Full rolls 12.2 m:
- 91 cm and 122 cm wide

Custom lengths:
- 91 cm and 122 cm width per linear meter

Wet/Dry or Oily Areas - Anti-Slip Solutions

Extra Traction

Thin anti-slip mats to improve safety in slippery work environments. Non-skid surfaces add traction and keep mats from shifting. Low profile for easy cart access. Loose lay for a quick and easy anti-slip solution.

Lightweight to facilitate lifting and cleaning with easy roll-up and clean-up. Made of tough compounds designed to yield a long service life.

Custom sizes. Calculated on square meter basis.

620 Diamond Flex Lok™

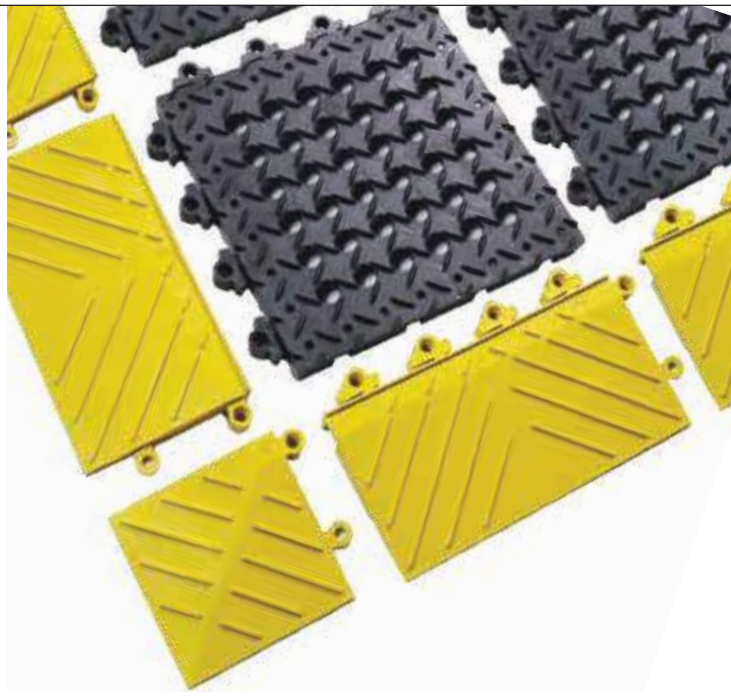

Specifications:
- Heavy duty PVC (DOP Free)
- Overall thickness: 25 mm
- Weight: 9.7 kg per m^2
- Anti-slip deck-plate surface design, tested R10 according to DIN51130 and BG-rule BGR181

Sizes:
- Tile: 30.48 x 30.48 cm

Accessories:
- Yellow Bevel: 15.24 x 30.48 cm
- Yellow Corner: 15.24 x 15.24 cm

Custom Sizes:
- Any dimension or shape, calculation on square meter basis

621 Diamond Flex Lok™ Solid

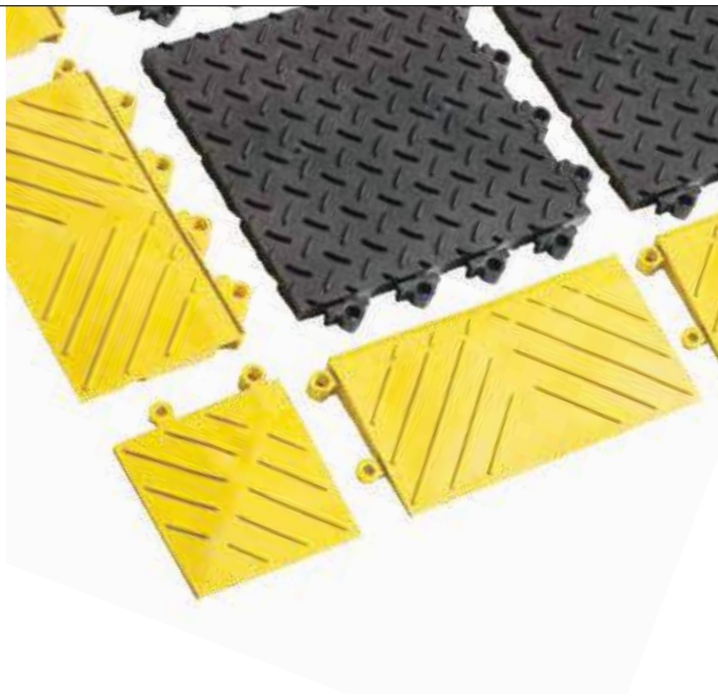

Specifications:
- Heavy duty PVC (DOP Free)
- Overall thickness: 25 mm
- Weight: 9.7 kg per m^2
- Anti-slip deck-plate surface design, tested R10 according to DIN51130 and BG-rule BGR181

Sizes:
- Tile: 30.48 x 30.48 cm

Accessories:
- Yellow Bevel: 15.24 x 30.48 cm
- Yellow Corner: 15.24 x 15.24 cm

Custom Sizes:
- Any dimension or shape, calculation on square meter basis

Electro-Static Discharge (ESD) Solutions

There is a growing demand for anti-static solutions in industrial and commercial environments. In many facilities, people are one of the prime generators of static electricity. The simple act of walking around can generate several thousand volts on the human body, especially in the winter when air becomes drier. If not controlled, static build up can cause static shock to employees and unseen damage to electronic components.

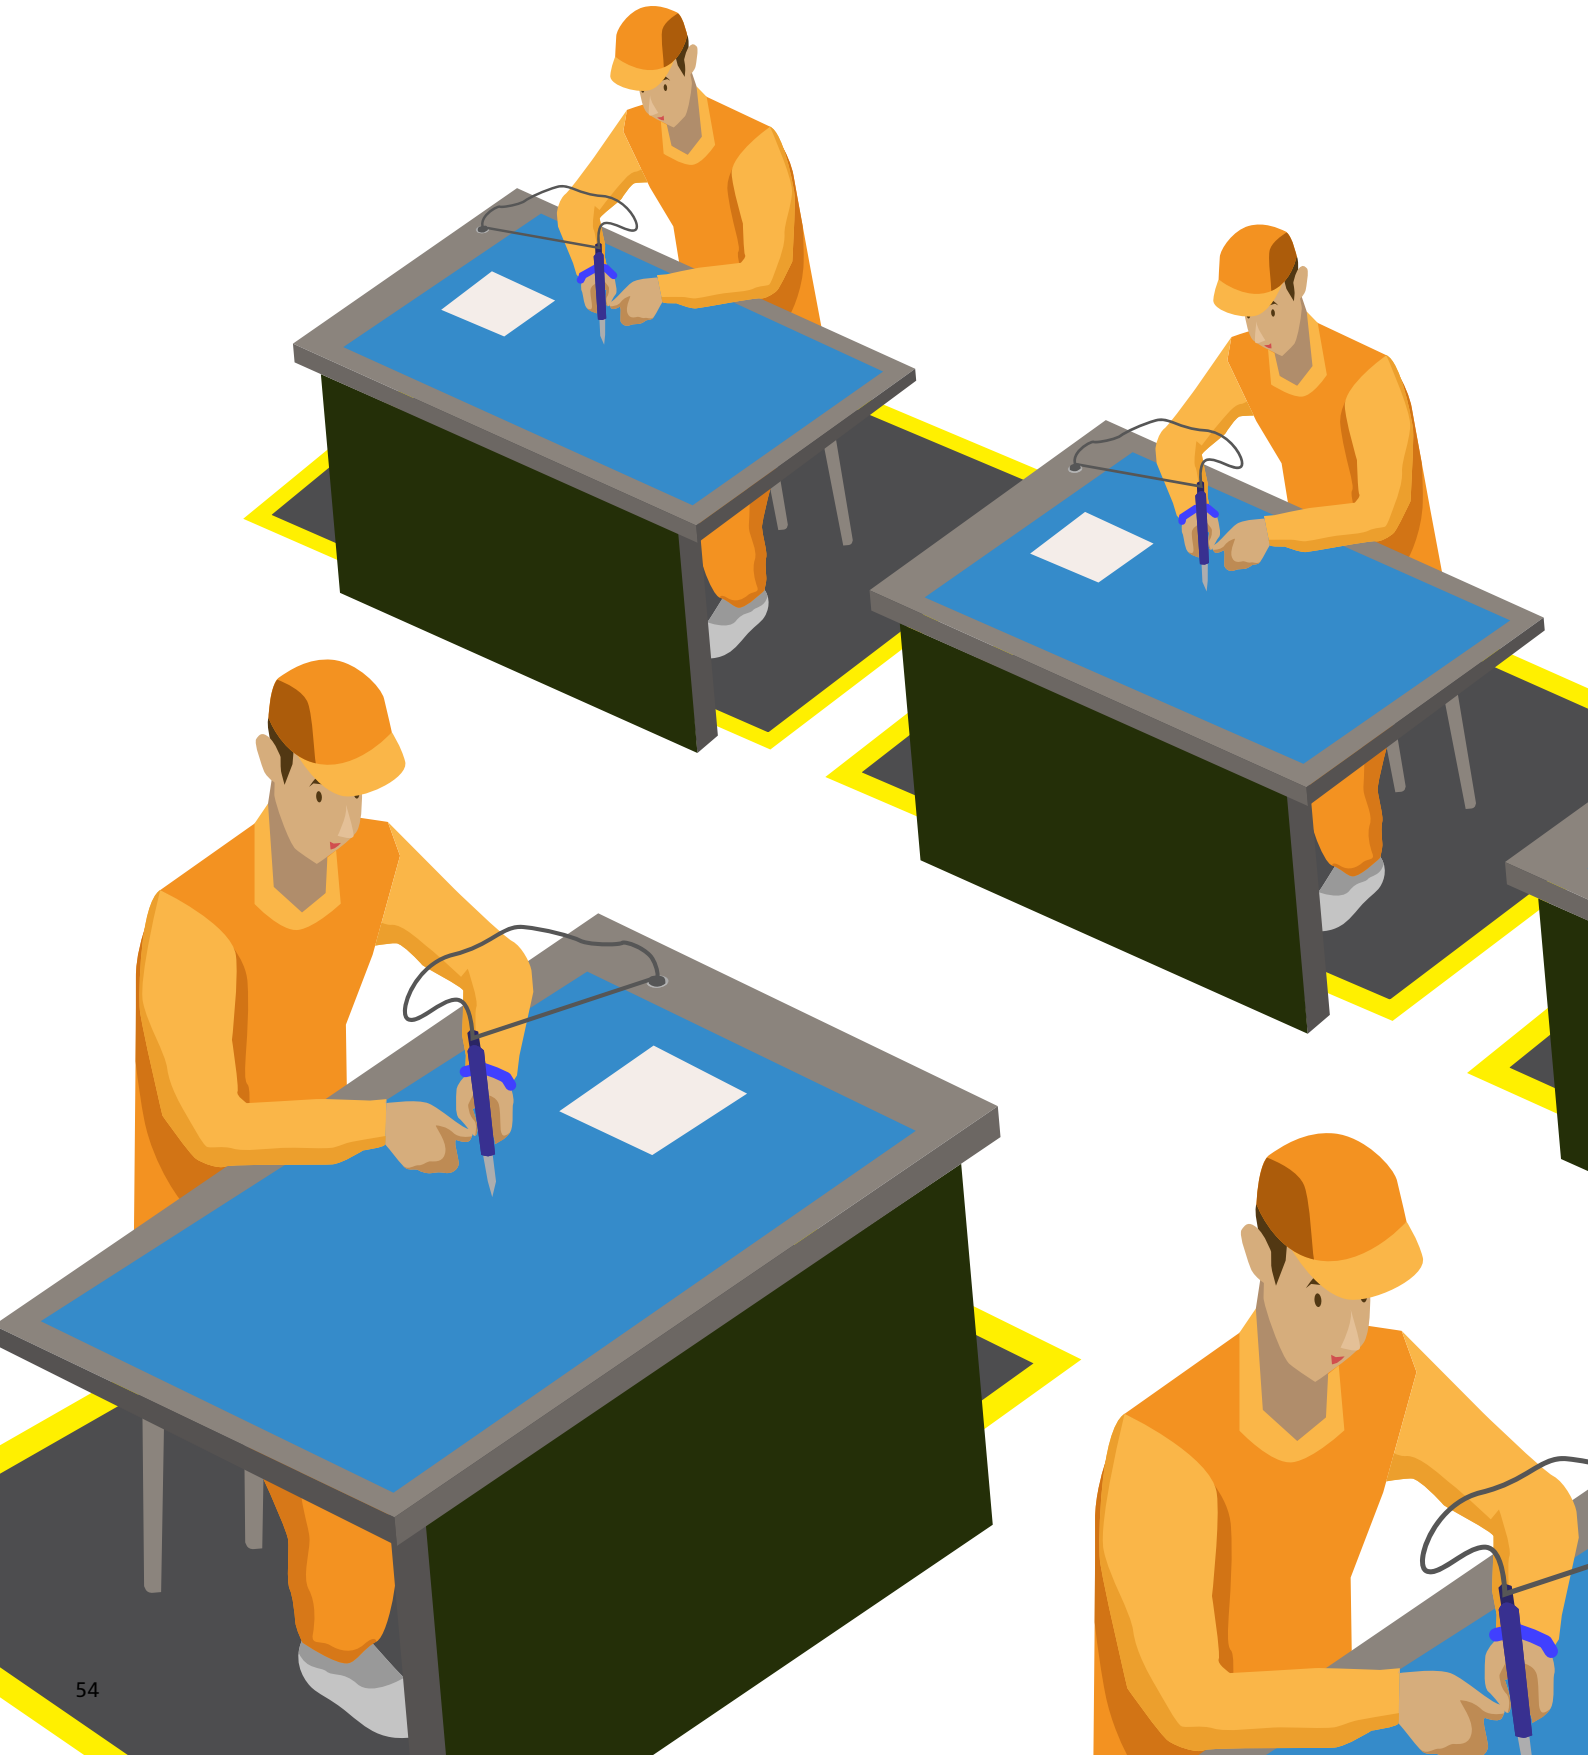

ESD Matting Solutions

To achieve an ESD protective work area while complying with Standard IEC61340-5-1 or ANSI EOS/ESD 6.1, all conductors in the environment, including personnel, must be grounded to the same electrical ground point, creating a balance between all items and personnel.

There are a number of ESD products to help reduce or eliminate static build-up from furniture, gear, and footwear to flooring. Many facility managers view static-dissipative flooring as the most-effective means to prevent ESD from becoming a problem. ESD rubber flooring has even been cited by MIT Lincoln Laboratories as having the most effective static protection for any application and the only static resistant product that works regardless of footwear.

Static dissipative matting has an electrical resistance range of $10^6 - 10^9$ measured in Ohms. Charges will flow to ground more slowly and in a somewhat more controlled manner than with conductive materials.

Notrax® also offers a full range of ESD accessories including grounding cords, wrist bands, heel grounders and ESD mat cleaner.

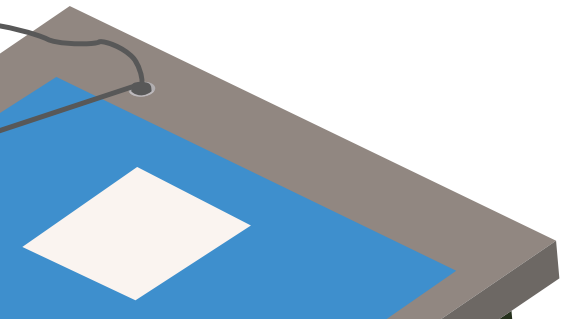

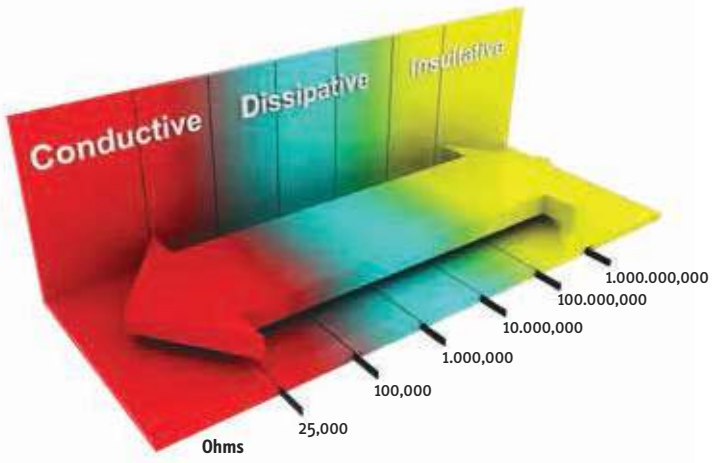

Dry Areas - Static Dissipative Mats

ESD Protective Mats

Static dissipative anti-fatigue mats protect against static shocks while providing comfort for standing workers. Bevelled edges on all four sides to minimize risk of tripping.

Meets IEC61340-4-1 (category DIF), measured resistance Rg 10^6 - 10^9 Ω, Rp 10^6 - 10^9 Ω. Electrostatic charge (walking test), meets ISO6356 and EN1815. Compatible with ESD Accessories on page 60/61.

826 Diamond Stat™

Ergonomic benefit derived from a 14-mm thick worker platform. A static dissipative combination of a tough top surface laminated onto a comfortable sponge base for maximum durability coupled with fatigue relief. Equipped with a 10-mm female socket attached to the mat and grounding cord. Diamond deck plate surface provides traction and allows easy twist turns. Featured with RedStop™ slip resistant backing to prevent mats from shifting. UniFusion™ technology, engineered to resist in the harshest work environments.

Specifications:
- 4.7 mm static dissipative PVC top surface permanently bonded onto a 9.3 mm resilient backing of microcellular vinyl
- Overall thickness: 14 mm
- Weight: 6.5 kg per m²
- Fire classification Cfl-S1 tested according to EN 13501

Recommended uses:
- Heavy duty - dry industrial environments

Stock sizes:
- 91 cm x 150 cm
  91 cm x 3 m

Full rolls 22.8 m:
- 91 cm x 22.8 m
  122 cm x 22.8 m

Custom lengths:
- 91 cm per linear meter
  122 cm per linear meter

Colours:
- Black



825 Cushion Stat™

Basic comfort derived from 9.4 mm thick worker platform of a static dissipative vinyl sponge that reduces fatigue and static build-up. Pebble pattern provides non-directional traction and is easy to clean. Optional 10 mm female socket attached to the mat for connection with optional grounding cord.

Specifications:
- Static dissipative vinyl sponge
- Overall thickness: 9.4 mm
- Weight: 3 kg per m²

Recommended uses:
- Light duty - dry areas

Colours:
- Black/yellow, Black, Grey

Stock sizes:
- 91 cm x 150 cm

Full rolls 18.3 m:
- 91 cm x 18.3 m

Custom lengths:
- 91 cm per linear meter



Dry Areas - Static Dissipative Table Mats & Accessories

ESD Protection from A to Z

Specialized line of ESD accessories to ensure a static free workplace and protect employees and sensitive electrical equipment. Use these accessories to connect table work surface, employees and conductive material to a common grounding point.

This creates a balance between all items and personnel to ensure static electricity will flow to ground in a controlled manner. For use in ESD working zones to protect electrostatic sensitive components.

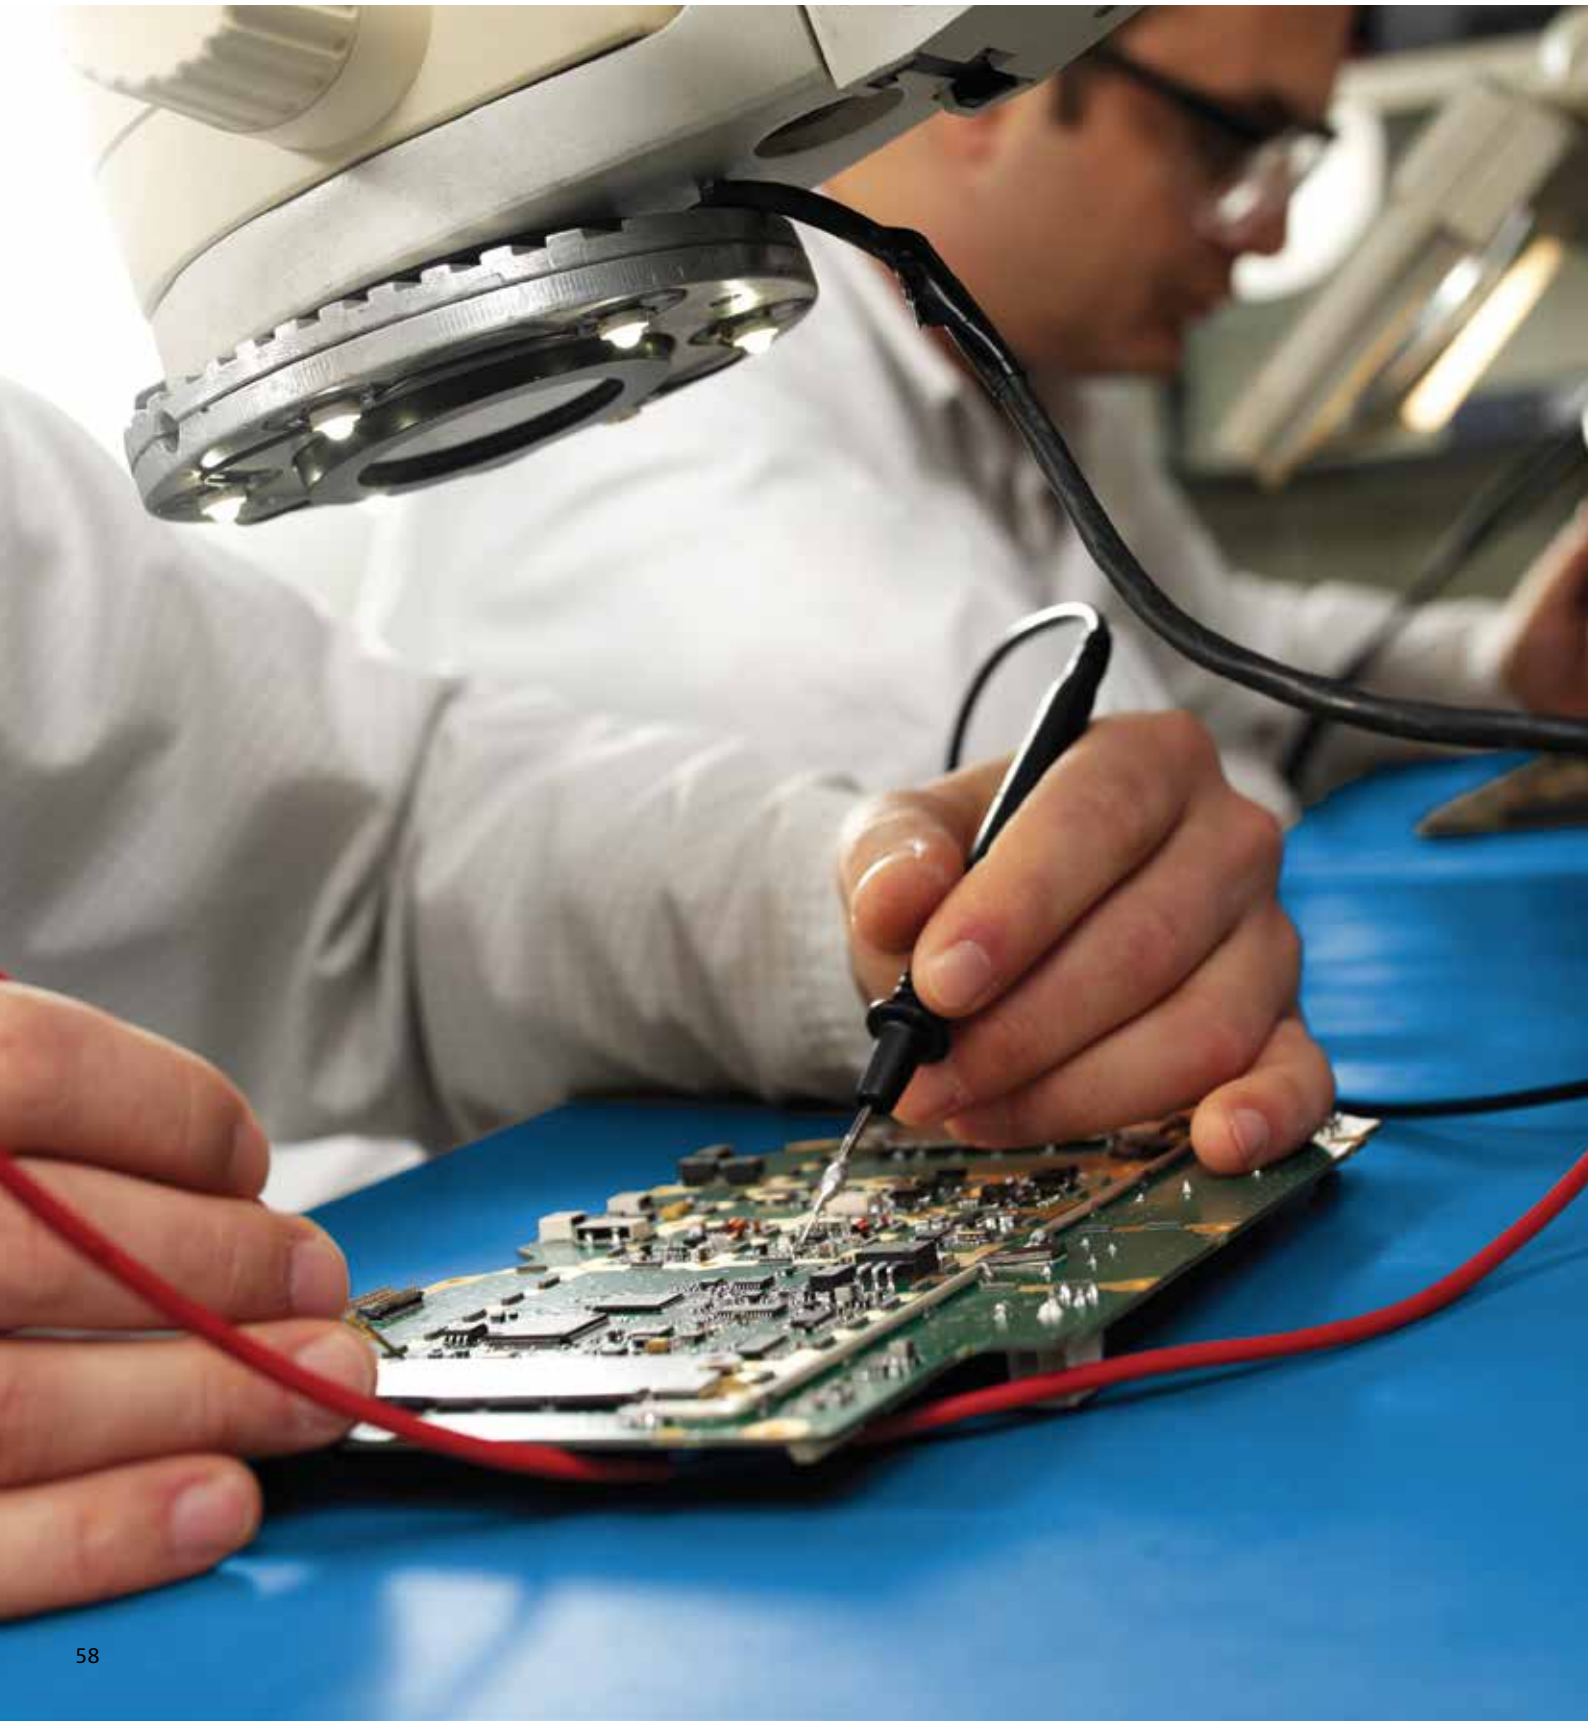

828 High Tech POP™ 3 Layer

Tri-layer static dissipative vinyl foam creates a thick and comfortable work surface for employees while protecting sensitive equipment from damaging static shocks. Thick construction has a conductive center for extremely stable load dissipation. Smooth top surface that is abrasion resistant and easy to wipe clean with recommended art. 057 Mat Cleaner. Optional grounding cord.

Specifications:
- Microcellular vinyl foam treated with dissipative static properties
- Overall thickness: 9.5 mm
- Weight: 3.75 kg per m^2
- Meets EOS/ESD-S4, measured resistance Rg 10^7 Ω and Rp 10^8 Ω
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Colours:
- Blue

Stock sizes:
- 60 cm x 18.3 m
  76 cm x 18.3 m
  91 cm x 18.3 m

Custom lengths 18.3 m:
- 60 cm per linear meter
  76 cm per linear meter
  91 cm per linear meter

829 Anti-Stat POP™ 3 Layer

Static dissipative vinyl runner with tri-layer construction and a conductive center for extremely stable load dissipation. Protects sensitive components from damaging static shocks. Smooth top surface that is abrasion resistant and easy to wipe clean with recommended art. 057 Mat Cleaner. Optional grounding cord.

Specifications:
- Microcellular vinyl foam treated with dissipative static properties
- Overall thickness: 2.4 mm
- Weight: 3 kg per m^2
- Meets EOS/ESD-S4, measured resistance Rg 10^7 Ω and Rp 10^8 Ω
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Colours:
- Blue, grey

Stock sizes:
- 60 cm x 15.2 m
  76 cm x 15.2 m
  91 cm x 15.2 m

Custom lengths 15.2 m:
- 60 cm per linear meter
  76 cm per linear meter
  91 cm per linear meter

827 Anti-Stat POP™

Single-layer static dissipative vinyl work surface to slowly remove static charges from conductive items placed on it. Smooth top surface that is abrasion resistant and easy to wipe clean with recommended art. 057 Mat Cleaner. Optional grounding cord.

Specifications:
- Microcellular vinyl foam treated with dissipative static properties
- Overall thickness: 6.4 mm
- Weight: 3 kg per m^2
- Meets EOS/ESD-S4, measured resistance Rg 10^7 Ω and Rp 10^8 Ω
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Colours:
- Blue

Stock sizes:
- 60 cm x 12.2 m
  76 cm x 12.2 m
  91 cm x 12.2 m

Custom lengths 12.2 m:
- 60 cm per linear meter
  76 cm per linear meter
  91 cm per linear meter

ESD Protection from A to Z

Specialized line of ESD accessories to ensure a static free workplace and protect employees and sensitive electrical equipment. Use these accessories to connect table work surface, employees and conductive material to a common grounding point.

This creates a balance between all items and personnel to ensure static electricity will flow to ground in a controlled manner. For use in ESD working zones to protect electrostatic sensitive components.

Ring terminal Art. 051SFG0100

Female socket Art. 051SFG0200

Ring terminal Art. 052SCG0100

Female socket Art. 052SCG0200

051 Floor Mat Grounding Cord

- 4.5m cable and connector that connects a mat to ground
- Easy to install, simply snap it to a mat and connect terminal to ground
- The low profile bevelled cap prevents the cord from being accidentally removed from the mat
- Resistor 1 Meg mat to ground
- Available with a ring terminal or 10 mm female socket

052 Common Grounding Point Cord

- 4.5m cable connects wrist bands or bench mat to ground
- Assures that all parts are at the same ground potential
- Easy to install, simply snap it to a mat, plug in the wrist strap coil cord and connect terminal to ground
- Resistor 1 Meg mat to ground
- Available with a ring terminal or 10 mm female socket

053 Coil Cord

- 1.8m cable connects wristband to common ground point on table mat
- 1 Meg resistor, 10 mm socket snaps to wristband, and the other end is a banana plug

754 Rib 'n' Roll™ ESD 3mm fine rib

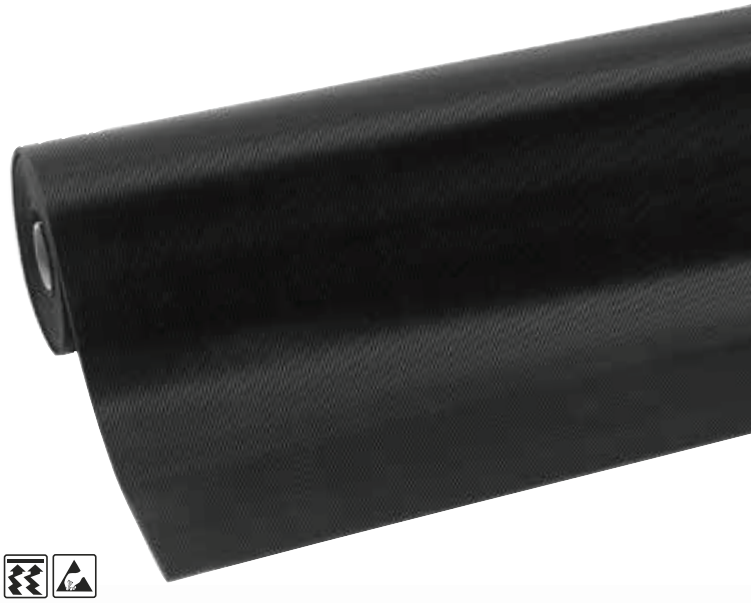

Static dissipative runner that slowly discharges static for lining workbenches, shelves, racks and carts during storage and handling of static sensitive components and parts. Protects sensitive components from damaging static shocks. Fine ribbed top surface that is abrasion resistant and easy to wipe clean with recommended art. 057 Mat Cleaner. Resistance standards for static dissipative are specific to the industry, environment, humidity and footwear.

Product Features:
- Static dissipative natural rubber
- Overall thickness: 3 mm
- Weight: 3 kg per m^2
- Meets EOS/ESD-S4, measured resistance Rg 10^7 Ω and Rp 10^8 Ω
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Stock sizes:
- 120 cm x 150 cm

743 Conductive Runner™

Conductive runner for rapid removal of static charges for walkways, lining workbenches, shelves, carts during storage and handling of static sensitive components and parts. Pebble top surface is non-directional, abrasion resistant and easy to wipe clean with recommended art. 057 Mat Cleaner. Resistance standards for conductive are specific to the industry, environment, humidity and footwear.

Product Features:
- Static dissipative vinyl foam
- Overall thickness: 3.8 mm
- Weight: 3 kg per m^2
- Meets EOS/ESD-S4, measured resistance Rg 10^7 Ω and Rp 10^8 Ω
- Electrostatic charge (walking test), meets ISO6356 and EN1815

Stock sizes:
- 91 cm x 18.3 m

Custom lengths 18.3 m:
- 91 cm per linear meter

Continental Version
Art. 054SEB0100

UK Version
Art. 054SEB0200

054 Earth Bonding Plug
- Connects grounding cords to ground
- 1 Meg Resistor, 3 x 10 mm male studs, allowing multiple cord connections per plug
- Available in Continental or U.K. version

055 Heel Grounder
- A device for connecting a walking or standing person to ground by using a conductive rubber thread to provide the necessary electrical contact between the person and the floor mat

056 Wrist Band
- Wrist Bands connect a worker's skin to ground and are therefore the primary means of controlling static charge on personnel. When properly worn and connected to ground, static charges are safely dissipated from the person

057 Mat Cleaner
- Mat cleaner is recommended for static safe table and floor mats. Its non-abrasive formula leaves no film and is designed to enhance the static dissipative properties of ESD safe surfaces. Effectively removes flux residues, oil, finger marks and dirt.
- Convenient 750 ml bottle trigger spray

ESD Protective Mats

Working environments and conditions vary for different companies and industries. Notrax has created several modular, linear and standalone anti-fatigue matting series that are completely customizable to create an ESD protective work area while complying with Standard IEC61340-5-1 or ANSI EOS/ESD 6.1. Compatible with ESD Accessories on page 60/61.

548 Diamond Flex™ ESD

- Static dissipative natural rubber compound for general purpose applications
- Overall thickness 18.4 mm

Page 25

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

558 Cushion Ease Solid™ ESD

- Static dissipative natural rubber compound for general purpose applications
- Overall thickness: 19 mm

Page 27

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

661 Cushion Ease Solid™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound resistant to oil
- Overall thickness: 19 mm
- Fire classification Bfl-S1 tested according to EN 13501

Page 27

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

463 Skywalker HD™ ESD

- Static dissipative natural rubber compound for general purpose applications
- Overall thickness: 13 mm

Page 31

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

464 Skywalker HD™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound resistant to oil
- Overall thickness: 13 mm
- Fire classification Bfl-S1 tested according to EN 13501

Page 31

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST

573 De-Flex™ ESD

- Static dissipative natural rubber compound for general purpose applications
- Overall thickness: 19 mm

Page 29

574 De-Flex™ ESD Nitrile FR

- Static dissipative 100% nitrile rubber compound resistant to oil
- Overall thickness: 19 mm
- Fire classification Bfl-S1 tested according to EN 13501

Page 29

457 Skystep™ ESD

- Static dissipative natural rubber compound for general purpose applications
- Overall thickness: 13 mm

Page 39

452 Skywalker® PUR ESD

- Static dissipative polyurethane foam for general purpose applications
- Overall thickness: 14 mm

Page 37

453 Skywalker® II PUR ESD

- Static dissipative polyurethane foam for general purpose applications
- Overall thickness: 14 mm

Page 37

Industrial Specialties - Electrical Protective Matting

Electrical Safety Solutions

Insulating matting prevents workers from being “grounded” and provides safety in case of electrical shock. Switchboard mats can be used in front of high voltage boxes, fuse boxes, transformers, electric sub-stations, transformers engine and generator rooms.

The corrugated saw-tooth top surface increases traction and is easy to sweep clean. Each square inch of matting is tested in conformance with ANSI/ASTM D-178 specifications. Must be replaced every 12 months for optimum safety.

832 Switchboard Matting™ Class 4

Specifications:
- PVC
- Overall thickness: 12.7 mm
- Weight: 16 kg per m²
- Class 4 - Dielectric Strength: 50,000 V
- Proof Test: 40,000 Volts
- Recommended maximum usage: 36,000 Volts

Stock sizes:
- 91 cm x 150 cm

Full rolls 9.14 m:
- 91 cm x 9.14 m

Custom lengths:
- 91 cm width

830 Switchboard Matting™ Class 2

Specifications:
- PVC
- Overall thickness: 6.4 mm
- Weight: 8.4 kg per m²
- Class 2 - Dielectric Strength: 30,000 V
- Proof Test: 20,000 Volts
- Recommended maximum usage: 17,000 Volts

Stock sizes:
- 91 cm x 150 cm

Full rolls 22.8 m:
- 91 cm x 22.8 m

Custom lengths:
- 91 cm width



833 Switchboard Matting™ Class 1

Specifications:
- PVC
- Overall thickness: 4.7 mm
- Weight: 7.6 kg per m²
- Class 1 - Dielectric Strength: 10,000 V
- Proof Test: 10,000 Volts
- Recommended maximum usage: 7,500 Volts

Stock sizes:
- 91 cm x 150 cm

Full rolls 22.8 m:
- 91 cm x 22.8 m

Custom lengths:
- 91 cm width

Industrial Specialties - Anti-Vibration Matting

979 Saddle Trax®

Thickest heavy duty anti-fatigue mat for extreme comfort in industrial environments. Dense microcellular foam absorbs point load as well as whole body vibrations for standing workers around machinery, on forklifts and platforms, while the tough laminated diamond plate surface provides maximum durability. RedStop™ slip-resistant backing keeps the mat from shifting.

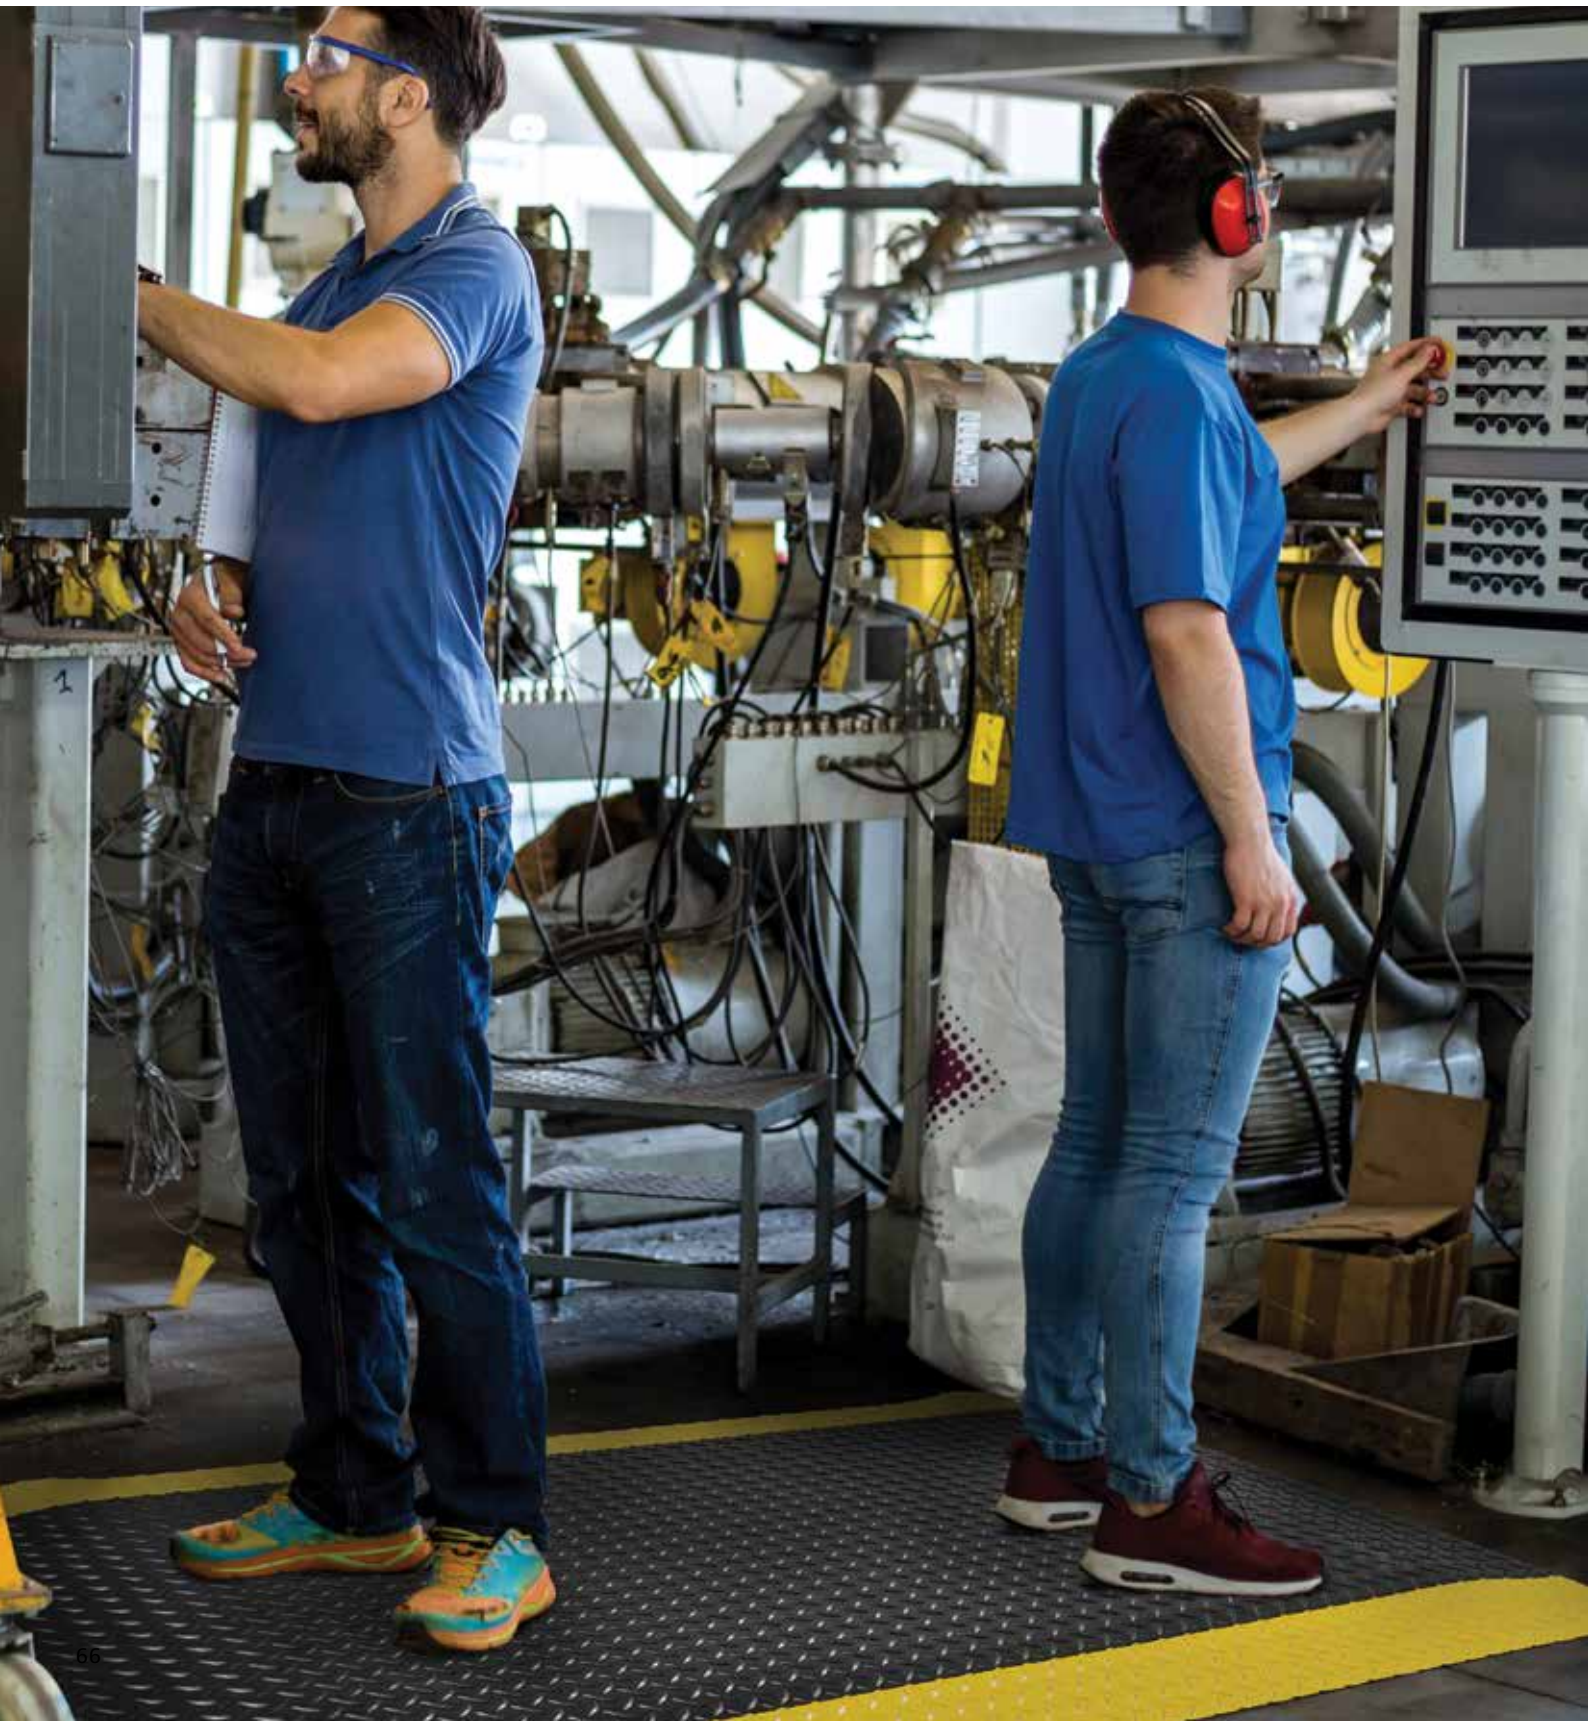

979 Saddle Trax®

Specifications:
Favours slip resistance and freedom of movement; tested R10 according to DIN51130 and BG-rule BGR181. Featured with RedStop™ slip resistant backing to prevent mats from shifting. Available yellow borders along sides comply with OSHA code 1910-144. Bevelled edges on all four sides to minimize risk of tripping. Lifetime warranty on Uni-Fusion™ lamination technology.

Recommended uses:
- Heavy duty - dry industrial environments in manufacturing plants, for individual workstations and standing platforms around vibrating machinery and fork lifts.

Specifications:
- 4.7 mm PVC top surface permanently bonded onto a 19-mmthick resilient backing of microcellular vinyl
- Overall thickness: 25 mm
- Weight: 7.3 kg per m^2
- Fire classification Cfl-S2 tested according to DIN EN ISO 13501

Colours:
- Black, Black/yellow

Stock sizes:
- 60 cm x 91 cm
  91 cm x 150 cm
  91 cm x 3 m
  91 cm x 6 m

Full rolls 22.8 m:
- 60 cm, 91 cm and 122 cm widths

Custom lengths:
- 60 cm, 91 cm and 122 cm widths

Wear resistance
Slip resistance
Anti-fatigue
GOOD BETTER BEST SUPERIOR

Industrial Specialties - Mats with Sorbents
Excessive Oily Area Solutions

Anti-fatigue matting designed for combined use with a sorbent. Ramps on four sides are raised to form a holder tray around the mat. Rough “gripper” surface prevents the sorbent from shifting.

Made of a high quality nitrile rubber compound that is resistant to most industrial oils and designed to yield a long service life. Non-shifting. Free of silicone therefore safe for vehicle painting facilities.

580 Sorb Stance™

For extremely oily industrial workstations where comfort, strength and resistance are compulsory. Ergonomic benefit derived from a 16-mm thick worker platform with raised studs on the backside to provide aeration and excellent cushioning comfort. Highly visible nitrile rubber orange coloured borders for added safety. Lengths are incremental by 30 cm.

Recommended uses:
- Heavy duty - wet/oily industrial environments

Specifications:
- Nitrile rubber compound, resistant to most industrial oils
- Orange coloured borders included comply with OSHA Code 1910-144
- Overall thickness: 20 mm
- Weight: 12 kg per m²
- Heavy duty - wet/oily industrial environments

Colours:
- Black

Stock sizes:
- 91 cm x 163 cm
  91 cm x 316 cm
  91 cm x 468 cm

Custom sizes:
- Available on demand

Accessories:
- Heavy duty sorbent, with added layer for extra durability
- Stock sizes: 80 cm x 150 cm
- Full Rolls 200 m: 80 cm width
- Custom sizes: 80 cm per increments of 150 cm

585 Eco Stance™

Ergonomic benefit derived from a 12.7-mm thick worker platform with a bubble design and moulded air pockets underneath to provide buoyancy for basic fatigue relief.

Recommended uses:
- Medium duty - wet/oily industrial environments

Specifications:
- Nitrile rubber compound, resistant to most industrial oils
- Overall thickness: 12.7 mm
- Weight: 6.8 kg per m²
- Medium duty - wet/oily industrial environments

Colours:
- Black

Stock sizes:
- 87 cm x 157 cm

Accessories:
- Standard sorbent
- Stock sizes: 80 cm x 150 cm
- Full rolls 200 m: 80 cm width
- Custom sizes: 80 cm per increments of 150 cm

Industrial Specialties - Shock Absorbing Matting

Solutions to Protect Floors and Equipment

Durable protection mats protect both floors and heavy equipment from damage. The thick platform can withstand heavy weights while the non-slip textured top surface ensures sure footing and freedom of movement.

Made of tough rubber compounds that make the mats virtually indestructible.

040 Slabmat Carré™

High quality 100% natural rubber mat that absorbs the shock of fallen materials and protects floors and equipment. These interlocking mats allow on-site customization. Units of 91 cm x 91 cm can be easily laid out from wall-to-wall or as islands, in any direction or shape. Bevelling solutions; allow out and inside corners.

Recommended uses:
- Heavy duty - dry areas for storage of heavy industrial equipment such as mould tools and engine blocks. Also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables

Specifications:
- Heavy duty 100% natural rubber compound
- Overall thickness: 13 mm
- Weight: 18 kg per m^2

Colours:
- Black

Stock sizes:
- 91 cm x 91 cm

Accessories:
- Sturdy male and female attachable bevels 91 cm x 5 cm, black and yellow

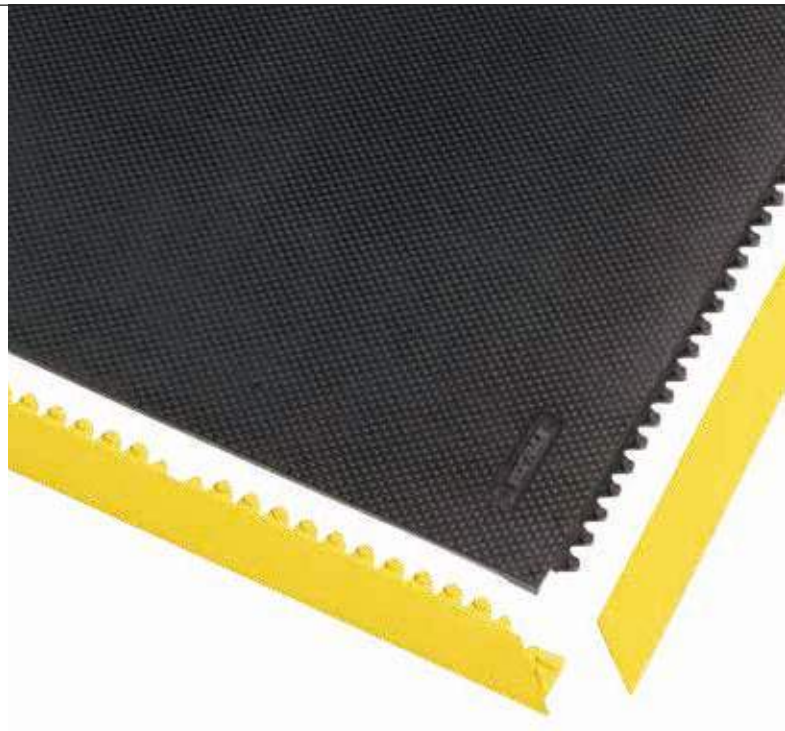



045 Slabmat™

Indestructible rubber mat that absorbs the shock of fallen materials and protects floors and equipment. Loose lay mat with no installation required.

Recommended uses:
- Heavy duty - dry areas for storage of heavy industrial equipment such as mould tools and engine blocks. Also suitable for gyms, weight rooms, skating rinks, golf courses, trailers and stables

Specifications:
- Tough rubber compound
- Overall thickness: 12.7 mm
- Weight: 18 kg per m^2

Colours:
- Black

Stock sizes:
- 120 cm x 180 cm

Industrial Specialties

PAH 3 Runners and Flooring

Runners can be used as flooring, shelf liners and near machines in all kinds of industrial applications to add extra traction or protection to industrial work floors, carts, cars or lorry boots. Liners can also be used any where objects tend to slide on work benches, tool boxes, countertops, cabinets and shelves to protect scratching and marring of tools. Certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01. Withstands diluted acids and alkalis.

757 Rib ‘n’ Roll P3™ 3 mm fine rib

- SBR rubber
- Surface: fine rib profile
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter

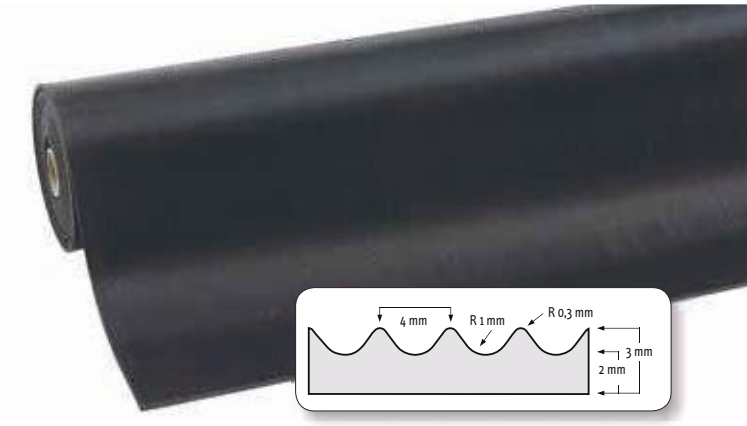

759 Rib ‘n’ Roll P3™ 3 mm broad rib

- SBR rubber
- Surface: broad rib profile
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter

742 Table Tac P3™ 3 mm smooth

- SBR rubber
- Surface: smooth surface
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter

737 Diamond Plate Runner

- Durable industrial vinyl flooring with rugged deck plate pattern for non-directional anti-slip
- PVC compound, resistant to industrial oils
- Surface: profile of raised diamonds.
- Tested and certified PAH Class 3 according to ZEK 01.4-08 for polycyclic aromatic hydrocarbons (PAH) standard AfPS GS 2014:01
- Hardness (ISO7619) 83 Shore A
- Tear strength (ASTMD-1004): 35 N/mm²
- Elongation at break: 225%
- Abrasive resistance: 0,09 grams lost maximum
- Flammability: Bfl-S1 fire rating, testing according to EN 13501-1
- Colours: black/yellow, black, grey
- Stock sizes: 91 cm x 22.8 m, 122 cm x 22.8 m

Grooved Rubber Runners and Flooring

Rubber runners can be used as flooring for runners or as extra traction and protection, or work table liners on tool boxes, work benches, countertops, cabinets and shelves to protect scratching and marring of tools, tool boxes, flooring or surfaces the liner is applied on.

Durable rubber and PVC materials with excellent wear and tear resistance. Used as flooring, shelf liners and in all kinds of industrial applications in workshops, near machines and any place where objects may tend to slide on workbenches, carts, cars or lorry booths. Withstands diluted acids and alkalis.

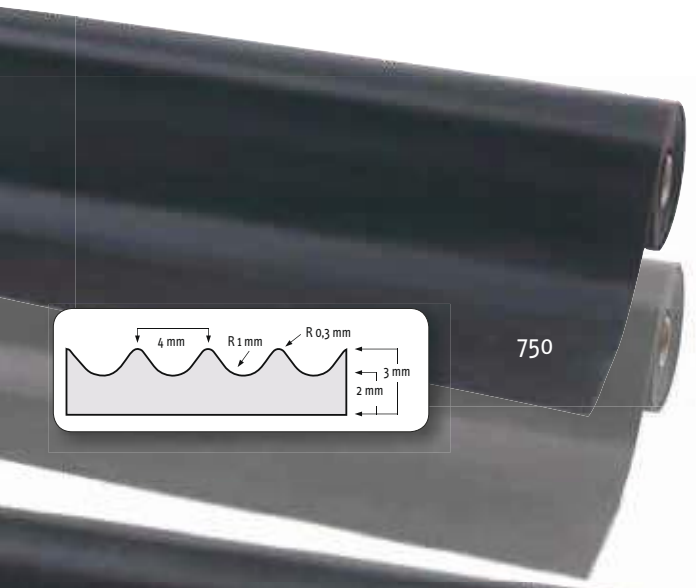

750 Rib 'n' Roll™ 3 mm fine rib

- SBR rubber
- Surface: fine rib profile
- Hardness (ISO7619, DIN53505): 60 Shore A
- Specific gravity (DIN53519): black 1.5 g/m³
- Tensile strength (DIN53504): 3.5 Mpa
- Elongation at break (DIN53504): 250%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Resistance to temperature: black -30°C, +70°C, grey -20°C, +70°C
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Stock sizes: grey 100 cm x 10 m
- Available by the linear meter

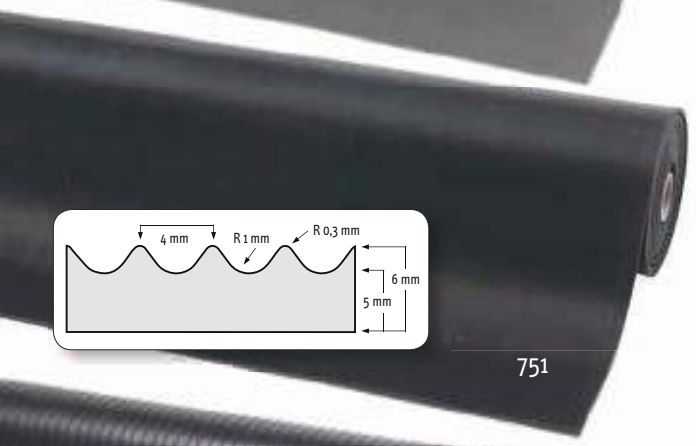

751 Rib 'n' Roll™ 6 mm fine rib

- Surface: fine rib profile
- Stock sizes: black 100 cm x 10 m
- Available by the linear meter

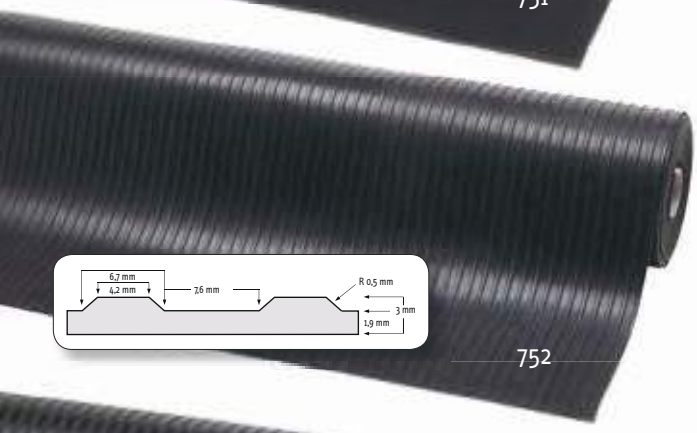

752 Rib 'n' Roll™ 3 mm broad rib

- Surface: broad rib profile
- Stock sizes: black 100 cm x 10 m, 120 cm x 10 m
- Available by the linear meter

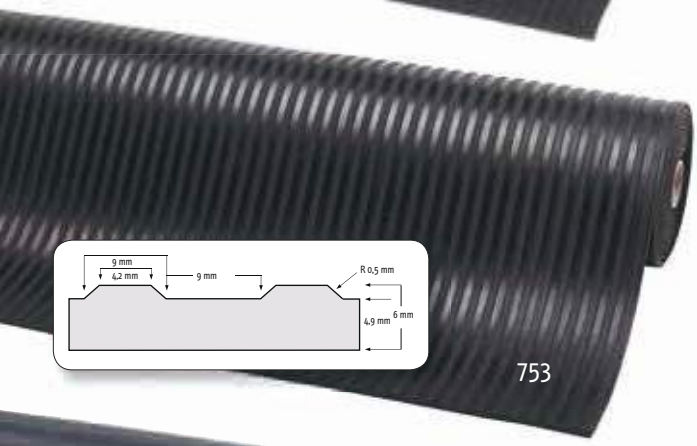

753 Rib 'n' Roll™ 6 mm broad rib

- Surface: broad rib profile
- Stock sizes: black 120 cm x 10 m
- Available by the linear meter

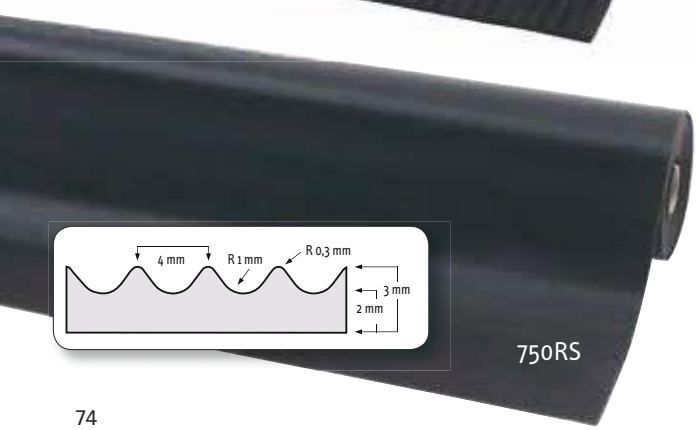

750RS Rib 'n' Roll™ RS 3 mm fine rib

- NBR/SBR rubber compound, grease resistant
- Surface: fine rib profile
- Hardness (ISO7619, DIN53505): 60 Shore A
- Specific gravity (DIN53519): black 1.5 g/m³
- Tensile strength (DIN53504): 3.5 Mpa
- Elongation at break (DIN53504): 250%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Resistance to temperature: black -10°C, +70°C
- Stock sizes: black 100 cm x 10 m
- Available by the linear meter

Non-directional Runners and Flooring

746 Check ‘n’ Roll™ 3 mm

Ideal flooring for factory and warehouse premises or any kind of industrial applications to protect floors and materials. Withstands diluted acids and alkalis.

- NR-SBR rubber
- Surface: industrial checker plate profile
- Hardness (ISO7619, DIN53505): 70 Shore A
- Density: black 1,45 g/m3, grey 1,60 g/m³
- Tear strength (ISO 34-1): black 4 N/mm2, grey 5 N/mm²
- Elongation at break: black 200%, grey 350%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Dimensional stability (EN 434): 0.15%
- Resistance to temperature: black -30°C, +70°C, grey -20°C, +70°C
- Sound reduction: 20 dB
- Stock sizes: black 140 cm x 10 m
- Stock sizes: grey 140 cm x 10 m
- Available by the linear meter

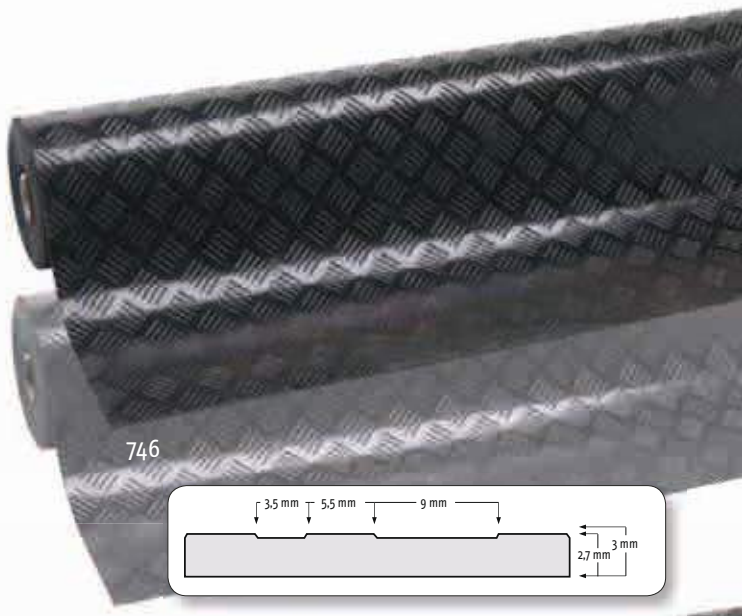

746GR Check’n’Roll™ 3 mm nitrile

- NBR (nitrile) rubber
- Surface: industrial checker plate profile
- Oil resistant
- Hardness (ISO7619, DIN53505): 65 Shore A
- Density: 1.43 g/m³
- Tear strength (ISO 34-1): 7 N/mm²
- Elongation at break: 250%
- Abrasive resistance (ISO4649, DIN53516): 300-500 mm³
- Dimensional stability (EN 434): 0.15%
- Resistance to temperature: -10°C, +70°C
- Sound reduction: 20 dB
- Stock sizes: black 140 cm x 10 m
- Available by the linear meter

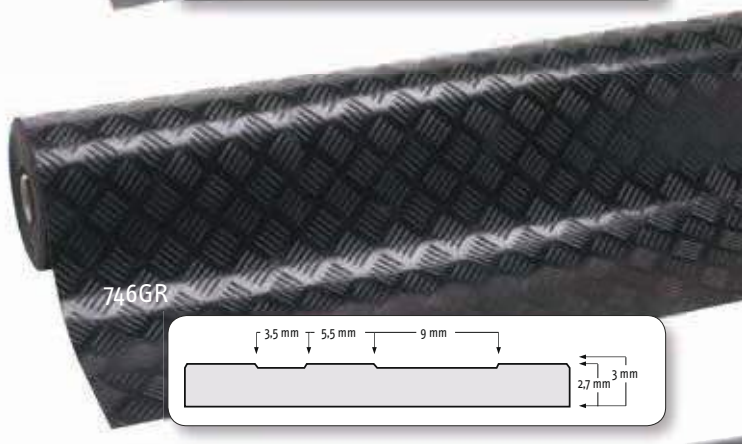

745 Dots’n’Roll™ 3.5 mm

All-round floor covering for industrial and general applications. Suitable for buildings, walking areas, stations, airports, supermarkets, lifts, buses, ships, etc

- SBR rubber
- Surface: profile of mildly raised dots
- Hardness (ISO7619) 75 Shore A
- Tear strength (ISO 34-1): 20 N/mm²
- Elongation at break: 250%
- Abrasive resistance (ISO4649): 250 mm³
- Dimensional stability (EN 434): 0.4%
- Resistance to temperature: -20°C, +70°C
- Sound reduction: 20 dB
- Stock sizes: black 100 cm x 10 m
- Stock sizes: grey 100 cm x 10 m

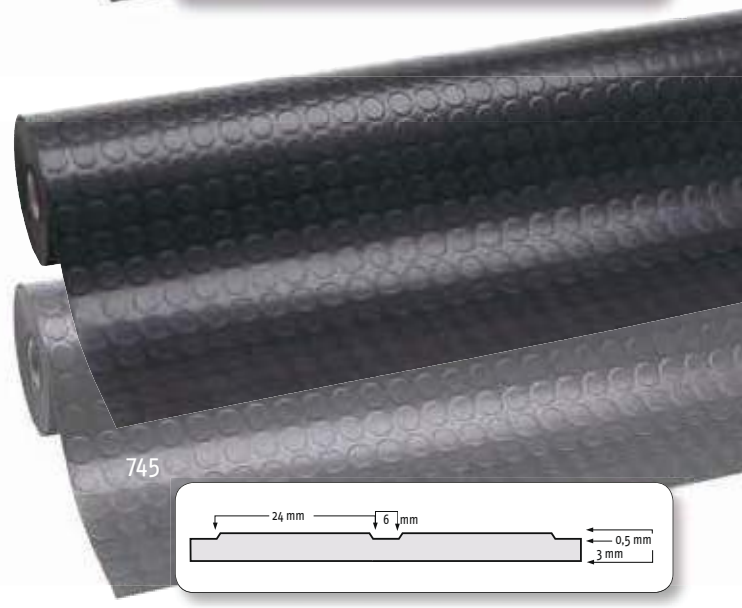

681 Grit Trax™

Gritted oil resistant vinyl with mineral coating for slip prevention in extremely wet or oily areas. Slip resistant vinyl backing.

- Overall thickness: 2.1 mm
- Weight: 2.3 kg per m²

Stock Sizes:

- 90 cm x 150 cm
- 90 cm x 18.3 m

Custom lengths:

- 90 cm width per linear meter

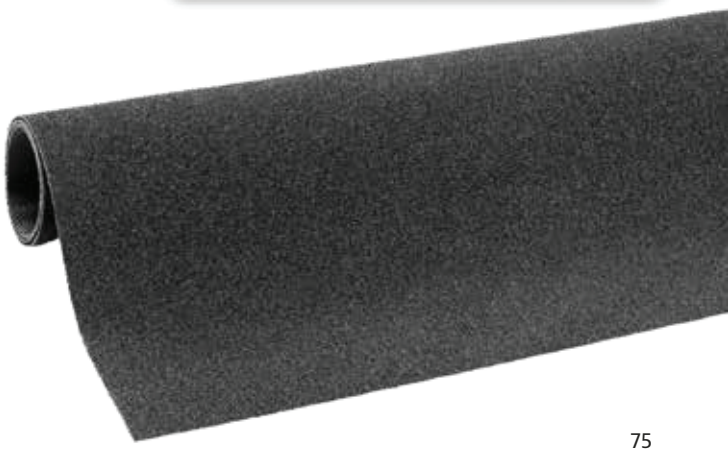

Food Processing and Matting Solutions

OSHA cites: “prolonged standing and repetitive or prolonged motions such as reaching, lifting, and chopping preparation areas as one of the hazards for kitchen workers".

Static postures may occur as workers stand in one position while preparing food, causing muscle fatigue. OSHA recommends providing anti-fatigue mats in addition to avoiding static postures.

Preparation and food handling is the most critical area to be vigilant about food safety for HACCP (Hazard Analysis Critical Control Point) standards in commercial kitchens and food production facilities, but also food operators, including importers, manufacturers, packers, distributors, retailers, food services and institutions.

Kitchen workers often work in areas with extreme temperatures, cold for preserving food during cleaning, preparation and packaging, or warm during cooking and serving.

Factory floors, particularly in the food processing industry, are often cold and wet. Floor mats elevate standing workers from cold floors. This helps keeping their feet warmer thereby improving the overall perception of well-being.

Wet/Dry and Greasy Areas - Food Processing Mats

526 Sani-Flex™ Series

Specially designed for the food industry, Sani-Flex™ food service anti-fatigue matting provides the optimum combination of comfort, anti-slip surface, quality and durability, as well as oil/grease resistance.

Made of tough rubber compounds, designed to yield a long service life. Aggressive slip resistant surface.

526 Sani-Flex™

Closed anti-slip gritted structure surface. Superb anti-fatigue properties due to its unique design underneath.

Recommended uses:

- Dry oily or greasy areas – food processing (meat, fish), food packaging, professional kitchens and food preparation areas

Specifications:

- Heavy duty 100% natural rubber compound
- Overall thickness: 12.7 mm
- Weight: 10 kg per m^2

Colours:

- Blue

Stock sizes:

- 46 x 61 cm
  60 x 90 cm

Wet/Dry and Greasy Areas - Food Service Mats

Rubber Duckboards

Food service anti-fatigue matting provides the optimum combination of comfort, anti-slip surface, drainage capacity, quality and durability, as well as oil/grease resistance.

Made of tough rubber compounds, designed to yield a long service life. Aggressive slip resistant surface.

550RD Cushion Ease™ Red

Square snap together units of 91 x 91 cm that can be assembled effortlessly and laid out from wall-to-wall or as island in any direction or shape. Smooth slip resistant surface.

Recommended uses:
- Wet oily or greasy areas – food processing (meat, fish), food packaging, professional kitchens and food preparation areas

Specifications:
- 75% nitrile rubber compound, resistant to oils and greases
- Overall thickness: 19 mm
- Weight: 10 kg per m²

Stock sizes:
- 91 cm x 91 cm

Colours:
- Red

Accessories:
- 551 MD Ramp System™ Nitrile male and female bevels in red, yellow and black

See the entire Cushion Ease™ and Cushion Ease Solid ™ line (page 26 and 46).

563RD Sanitop Deluxe™ Red

Non-shifting: heavy weight keeps mat in place. Ergonomic benefit derived from a 20-mm thick worker platform. Large drainage holes and raised studs provide aeration and allow fluids and debris to fall through, leaving the surface clear. Cleaning with detergent and water jet is recommended for extended service life.

Recommended uses:
- Wet oily or greasy areas – food processing (meat, fish), food packaging, professional kitchens and food preparation areas

Specifications:
- 75% nitrile rubber compound, resistant to oils and greases
- Overall thickness: 20 mm
- Weight: 12.3 kg per m²

Colours:
- Red

Stock sizes:
- 91 cm x 152 cm

Accessories:
- Connectors for widthwise or lengthwise expansion

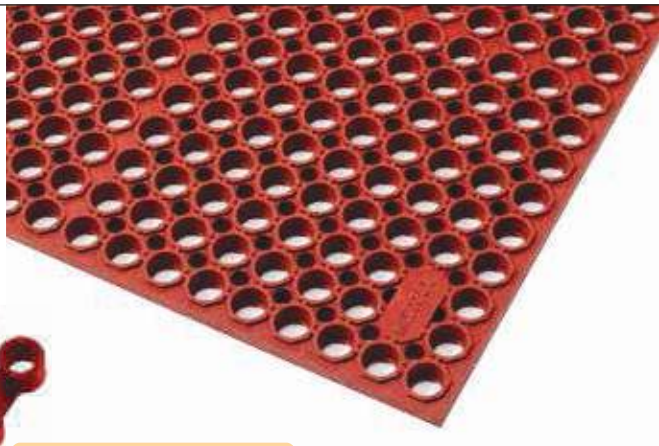

563 Sanitop Deluxe™ is also available in a natural rubber compound for general purpose applications (page 49).

562RD Sanitop™ Red

Provides basic comfort and traction in wet or greasy areas. Large drainage holes and raised studs provide aeration and allow fluids and debris to fall through, leaving the surface clear. Aggressive slip resistant surface.

Specifications:
- 75% nitrile rubber compound, resistant to oils and greases
- Overall thickness: 12.7 mm
- Weight: 8 kg per m²

Recommended uses:
- Wet or oily/greasy areas – food processing, professional kitchens, cooking lines, food preparation areas, bars and cleaning areas

Stock sizes:
- 91 cm x 152 cm
  91 cm x 297 cm
  91 cm x 594 cm

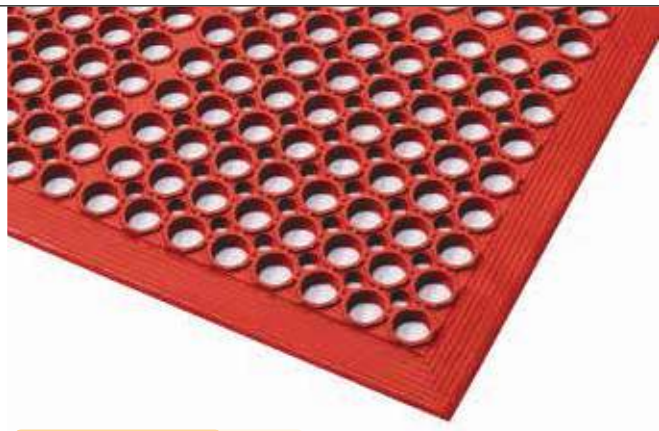

562 Sanitop™ is also available in a natural rubber compound for general purpose applications. (page 49).

Wet and Dry Areas - Food Service Mats

Ergonomy on Slippery Floors

These mats are designed to meet individual food service requirements. Ergonomic benefit derived from a thick worker platform made of a tough yet resilient nitrile rubber blend that is resistant to vegetable oils and greases.

Anti-slip surface provides sure footing. Bevelled edges prevent tripping on the mat. Cleaning with detergent and water jet is recommended for extended service life.

455 Skystep™

Standalone rubber mats have a gritted surface pattern with ergonomic bubble pattern to provide maximum fatigue relief while maintaining its anti-slip properties.
The mat is designed to suction to the ground to prevent the mat from shifting, and trap air in its chambers to create an ultimate cushioning effect while keeping the mat lightweight.

Specifications:
- Natural rubber compound for general purpose use
- Overall thickness: 13 mm
- Weight: 10 kg per m²

Recommended uses:
- Dry areas – food processing, food packaging, food preparation areas and bars

Stock sizes:
- 60 cm x 90 cm
  90 cm x 120 cm
  90 cm x 150 cm

562 Sanitop™

Provides basic comfort and traction in wet or greasy areas. Large drainage holes and raised studs provide aeration and allow fluids and debris to fall through, leaving the surface clear. Aggressive slip resistant surface.

Specifications:
- Natural rubber compound for general purpose use
- Overall thickness: 12.7 mm
- Weight: 8 kg per m²

Recommended uses:
- Wet areas – food processing, professional kitchens, cooking lines, food preparation areas, bars and cleaning areas

Stock sizes:
- 91 cm x 152 cm
  91 cm x 297 cm
  91 cm x 594 cm

Wet and Dry Areas - Food Service Mats

Reversible Anti-slip Mats

Reversible anti-slip matting provides comfort and adds traction for good adherence in dry, wet and greasy areas. Usable on both sides for extended life. An effective, economical and durable solution to reduce the risk of slips and falls.

Low profile for easy cart access. Lightweight to facilitate lifting and cleaning. Raised studs provide grip and aeration and keeps mat from shifting.

566 Superflow® XT

Reversible anti-slip mat is remarkably comfortable and usable on both sides for extended life. Its perforated woven surface is slip resistant while allowing instant evacuation of liquids in wet areas. Low profile for easy cart access and lightweight to facilitate lifting and cleaning.

Recommended uses:
- Wet areas – food processing, professional kitchens, cooking lines, food preparation areas, bars and cleaning areas

Specifications:
- 100% natural rubber compound for general purpose applications
- Overall thickness: 8.5 mm
- Weight: 8.8 kg per m²

Stock sizes:
- 60 cm x 90 cm
  91 cm x 152 cm
  122 cm x 183 cm

567 Superflow® XT Nitrile

Oil resistant reversible anti-slip mat is remarkably comfortable and usable on both sides for extended life. Its perforated woven surface is slip resistant while allowing instant evacuation of liquids in wet areas. Low profile for easy cart access and lightweight to facilitate lifting and cleaning.

Recommended uses:
- Wet areas – food processing, professional kitchens, cooking lines, food preparation areas, bars and cleaning areas

Specifications:
- 100% nitrile rubber compound is resistant to most industrial oils
- Overall thickness: 8.5 mm
- Weight: 8.8 kg per m²

Stock sizes:
- 60 cm x 90 cm
  91 cm x 152 cm
  122 cm x 183 cm

T23 Multi Mat II®

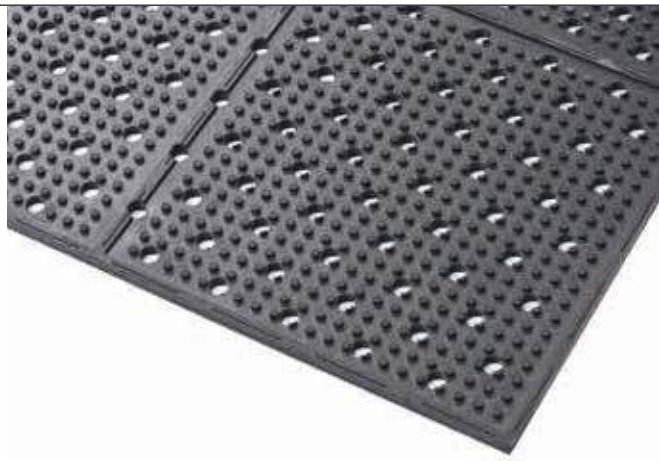

Drainage holes for instant evacuation of fluids allow debris to fall through, leaving the surface clear.

Recommended uses:
- Wet areas – food processing, professional kitchens, cooking lines, food preparation areas, bars and cleaning areas

Specifications:
- Black: natural rubber compound for general purpose applications
- Red: 75% nitrile rubber compound, resistant to oils and greases
- Overall thickness: 9.5 mm
- Weight: 9.9 kg per m²
- Slip resistance R10 measured according to DIN 51130

Colours:
- Black, Red

Full rolls 9.75 m:
- 60 cm, 91 cm and 122 cm widths

Stock sizes:
- 60 cm x 122 cm
  60 cm x 244 cm
  91 cm x 122 cm
  91 cm x 244 cm
  122 cm x 122 cm
  122 cm x 244 cm

Wet/Dry and Greasy Areas - Disinfection Matting

346 Sani-Trax™

Sani-Trax™ mat cleans and sanitizes shoes and is recommended at entrances to all food processing areas. As traffic passes, rubber tips bend under pressure to immerse soles in disinfectant solution, a double action that keeps contamination from reaching food processing areas.

Thousands of flexible fingers provide an automatic scrubbing action that dislodges contaminants from footwear. Convenient mat size fits most doorways. Suction cups on underside prevents mat from shifting.

346 Sani-Trax™

Specifications:

- Made of 100% tough natural rubber compound for general purpose applications
- Overall thickness: 19 mm
- Weight: 10.8 kg per m^2
- Thick surrounding border stands >0,635 cm higher than fingerscrapers to contain liquid disinfectant.
- Mat holds 4 litres of disinfectant solution. (Tip: use quaternary ammonium, iodine, chlorine or any other sanitizer but always test its concentration. Most sanitizers are concentrated and must be diluted before use in a footbath. Follow label directions for appropriate dilutions)

Recommended uses:

- At doorways, starter rooms, packaging areas, laboratories, employee locker rooms, break rooms, refuse areas and receiving rooms-any place where spread of contamination needs to be limited

Size:

- 61 cm x 81 cm
  45 cm x 60 cm

Dry Areas - Disinfection Matting

348 Sani-Master™

This unique disinfection entrance matting solution combines the Notrax® formula of sanitization, absorption and modularity into one complete solution. The Sani-Master™ is a 19-mm thick extendable mat that cleans, sanitizes and dries shoes. Traditionally used in the food industry, Sani-Master™ has become mainstream as part of general hygiene protocols and is recommended at entrances of schools, hotels, gyms, and offices, as well as pharmacies, health care facilities, and hospitals to prevent contamination from entering the building.

348 Sani Master™

Section 1 incorporates the Sani-Trax® disinfection foot bath with flexible bristles that bend to immerse soles in disinfectant solution to wash and disinfect shoes as traffic passes.

Section 2 is an extendable drying zone to dry shoes and prevent slips with patented connection system that is seamless to avoid changes in height or disconnection of the mats.

Section 3 is an end drying zone to prevent slipping. The drying carpets can be fully customized with a logo, design or used for communication of hygiene protocols such as hand disinfection and social distancing.

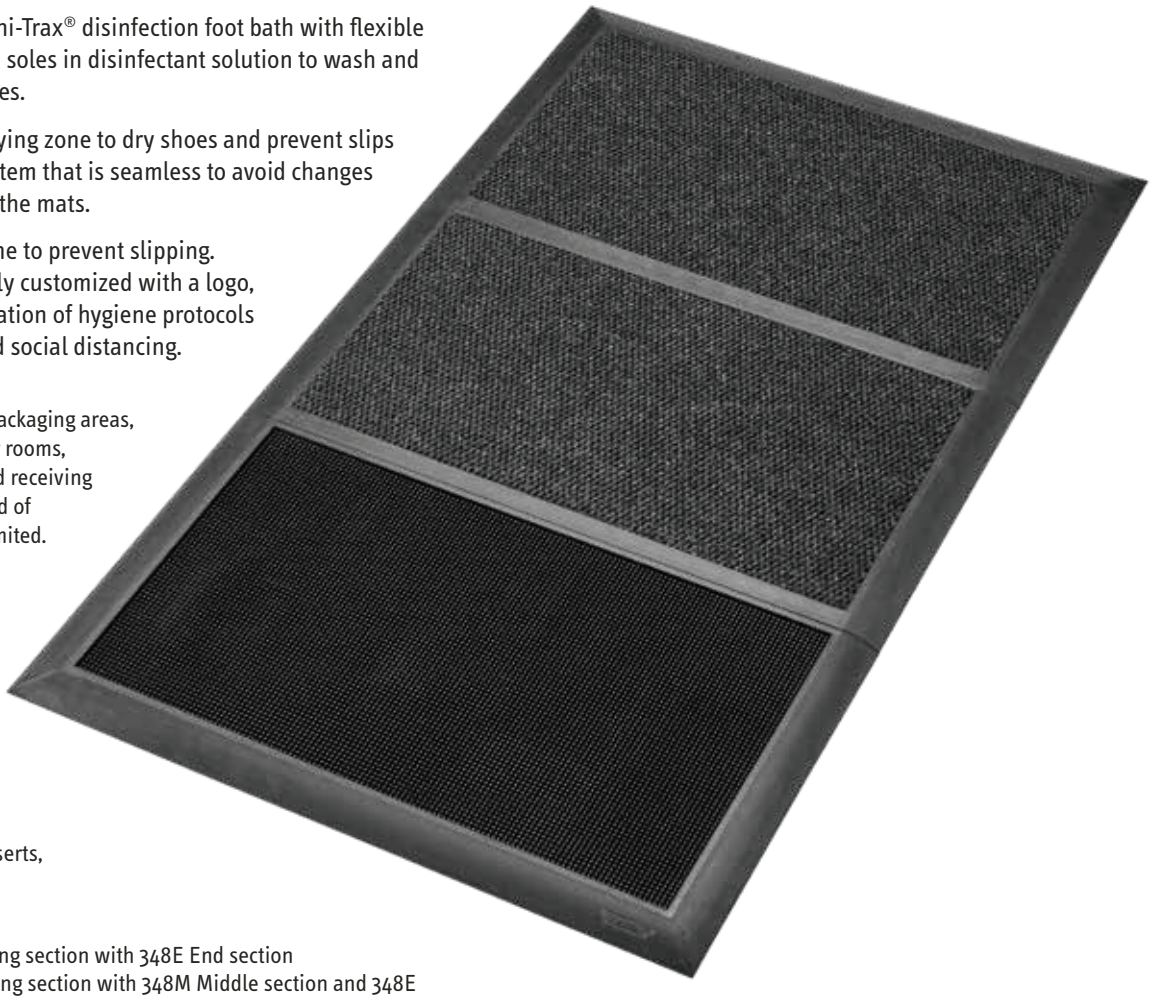

Recommended uses:
- At doorways, starter rooms, packaging areas, laboratories, employee locker rooms, break rooms, refuse areas and receiving areas. Any place where spread of contamination needs to be limited.

Specifications:
- Heavy duty natural rubber compound with 100% anti-static polypropylene fibres needle punch carpet insert
- Overall thickness: 14 mm
- Weight: 5.5 kg per m²

Colours:
- Black with charcoal carpet inserts, black with logo inserts

Stock sizes:
- 91 cm x 101 cm - 3480 Sanitizing section with 348E End section
- 91 cm x 192 cm - 3480 Sanitizing section with 348M Middle section and 348E End section
- 91 cm x 273 cm - 3480 Sanitizing section with two 348M Middle sections and 348E End section

Accessories:
- 348 M Extendable drying middle section

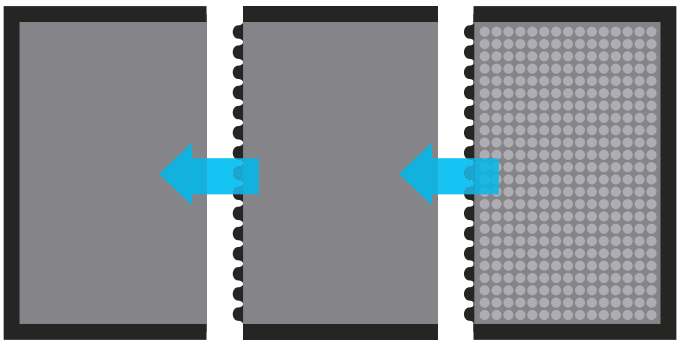

348E Absorbing End Section

348M Extendable Absorbing Middle Section

3480 Sanitizing Section

Anti-Slip Hygienic Matting Solutions

One of the most common causes of swimming pool accidents is slips and falls. In and around locker rooms, swimming pools and showers are a slip hazard with wet, slippery and cold floors. Plus the use of shampoos, soaps and oils often compound this problem.

Notrax® hygienic mats create a healthier and safer environment by providing instant drainage and slip resistance as well as preventing growth of micro-organisms which cause infections and skin diseases.

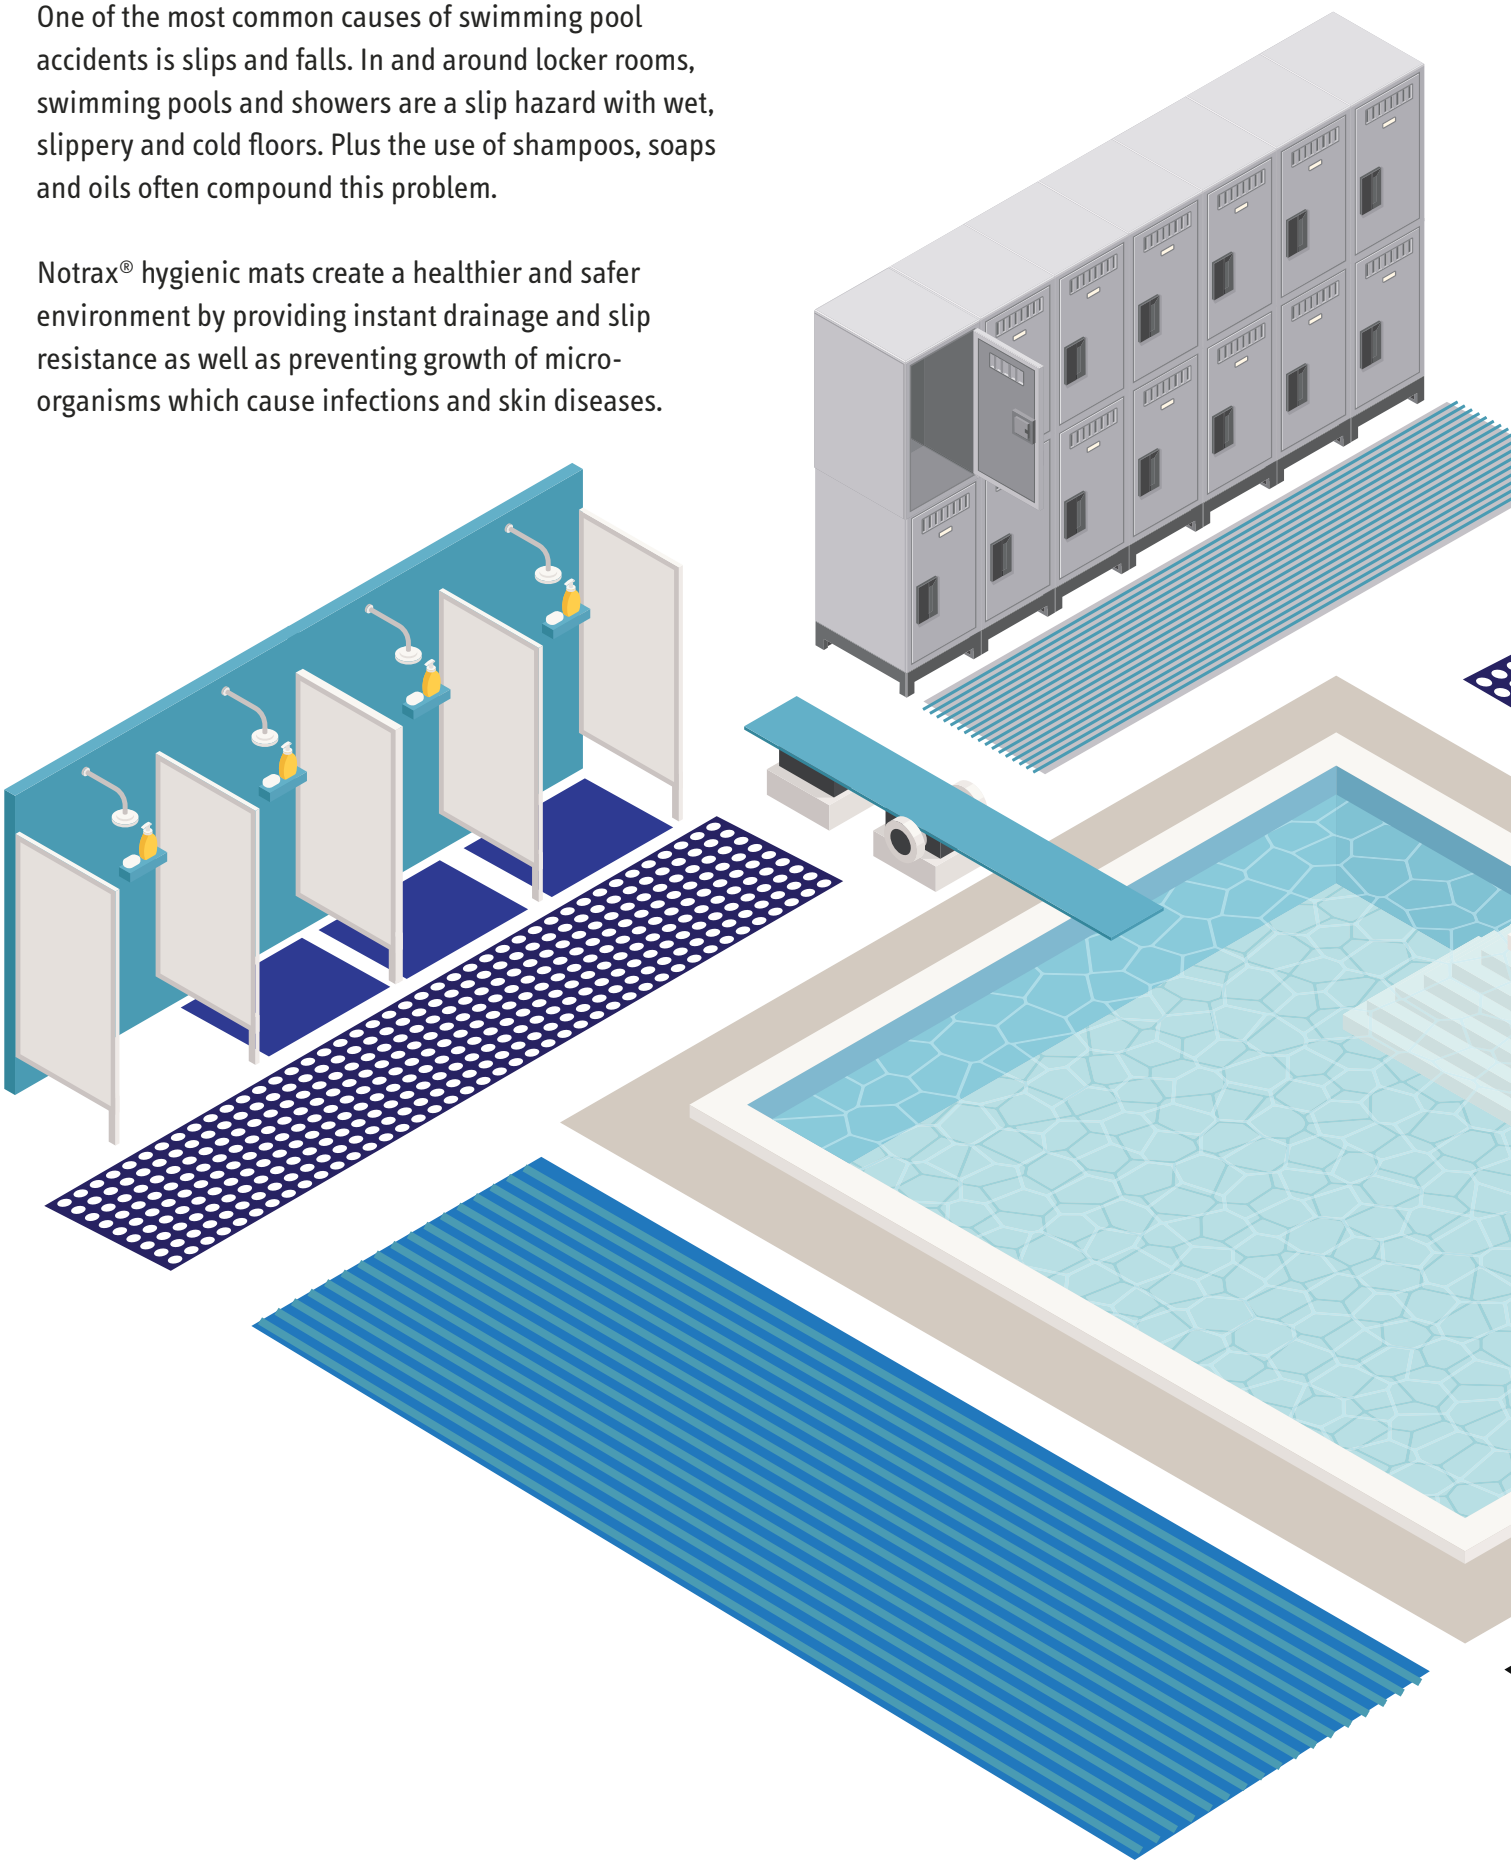

Hygienic matting is treated with an anti-microbial additive to prevent growth of bacteria, fungi and other micro-organisms that cause odours, rashes, athlete's foot and other skin infections. The mat is designed to be comfortable and warm for bare feet, isolating users from the cold and often wet floors, while also offering grip for slip prevention.

Hygienic anti-slip matting with an open grid allows for easy drainage of water while the raised structure provides aeration for easy drying and prevents the mat from floating.

Notrax® matting is available on rolls or interconnecting tiles that can easily be laid, installed or customized for walkways, changing room floors, showers and saunas, and along swimming pools to prevent slipping.

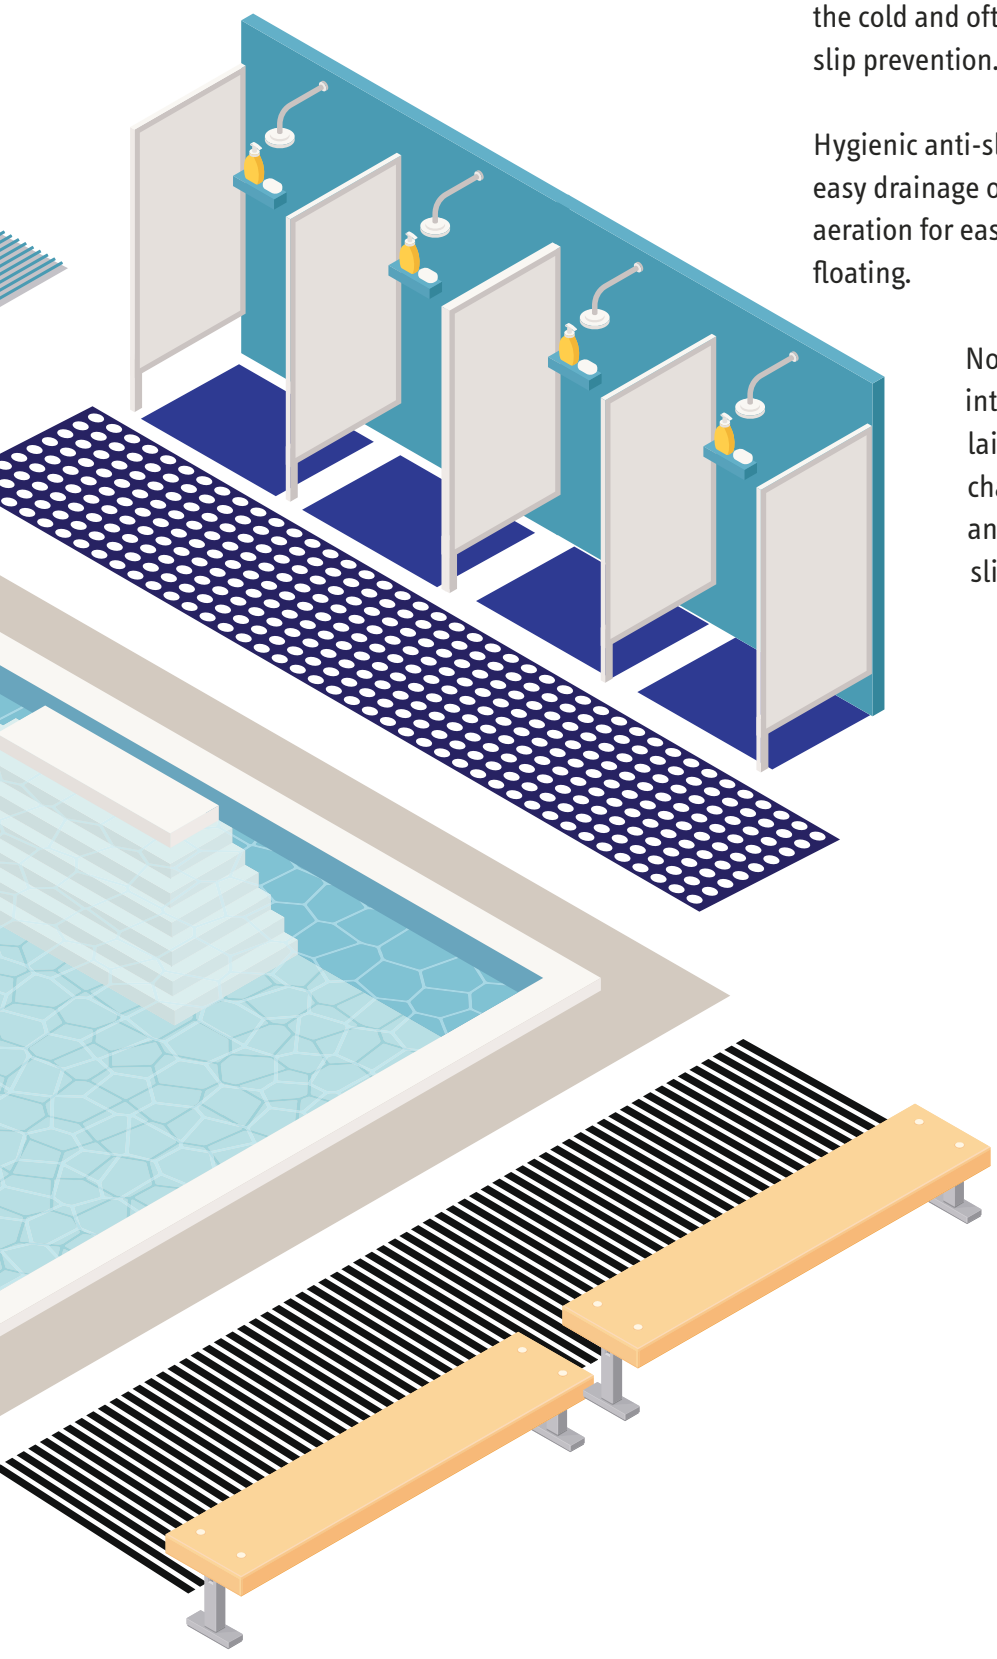

Wet Areas - Hygienic Mats

Soft and Warm for Happy Feet

Durable hygienic matting creates a healthier and safer environment in wet areas such as shower facilities. The grip design creates a slip-resistant yet comfortable walking surface for bare feet.

Antimicrobial treated materials prevents growth of fungi and bacteria. Open structure for easy drainage. Easy to clean and requires minimal maintenance. Ideal for saunas, locker rooms and swimming pools.

536 Akwadek™

- Heavy duty UV resistant antibacterial PVC grid matting
- Overall thickness: 12 mm
- Weight: 7.5 kg per m²

Colours:
- Blue, Grey

Full rolls 10 m:
- 60 cm, 91 cm and 122 cm widths

Custom lengths:
- 60 cm, 91 cm and 122 cm widths

Accessories:
- Black connector clips available for widthwise/lengthwise expansion
- 90-degree connections

538 Gripwalker Lite™

- Light duty UV resistant antibacterial PVC wave matting
- Overall thickness: 5.3 mm
- Weight: 3.6 kg per m²

Colours:
- Blue, Grey

Full rolls 12,2 m:
- 91 cm and 122 cm widths

Custom lengths:
- 91 cm and 122 cm widths

535 Soft-Step™

- Light duty UV resistant antibacterial polyethylene wave matting
- Overall thickness: 9 mm
- Weight: 4.3 kg per m²

Colours:
- White-Dotted, Beige, Blue

Full rolls 15 m:
- 60 cm width x 15 m

Custom lengths:
- 60 cm widths

Accessories:
- Connector clips available for widthwise expansion

Chemical Resistance Guide

Chemical	Form	Chemical Family	Concentration	Article Group 040, 045, 346, 348 430, 433, 440, 443, 455, 457, 460, 463, 546, 550, 556, 558, 562, 563, 566, 570, 754, 746, 750, 751, 752, 753, 757, 759, T23	Article Group 432, 434, 435, 442, 444, 445, 456, 462, 464, 465, 469, 489, 526, 527, 547, 549, 559, 567, 572, 575, 580, 585, 649, 650S, 650SFR, 656S, 656SFR, 661S, 850, 856, 875	Article Group 750RS 746GR 563RD 550RD 562RD T23RD	Article Group 782, 479, 826, 406, 413, 417, 419, 408, 409, 410, 411, 825, 827, 828, 829, 979	Article Group 536, 537, 538, 539, 620, 621, 681, 737, 830	Article Group 450 451 452 453
2-Propanol (isopropal alcohol)	Liquid	Alcohol		1	2	2	2	2	4
Acetaldehyde	Liquid	Aldehyde	50%	2	4	4	3	3	4
Acetic Acid	Liquid	Acid (weak, organic)	Glacial	3	3	3	4	4	4
Acetic Acid	Liquid	Acid (weak, organic)	50%	2	3	3	2	2	3
Acetic Anhydride	Liquid	Acid (weak)		3	2	2	4	4	4
Acetone	Liquid	Ketone		3	4	4	3	3	4
Ammonium Hydroxide	Liquid	Base (weak)	28-30%	4	4	4	1	1	4
Amyl Acetate	Liquid	Carboxylic Acid (Aliphatic)		4	4	4	3	3	4
Aniline	Liquid	Base (aromatic, organic)		4	4	4	4	4	4
ASTM #1	Liquid	Paraffin Oil		4	1	1	n/a	n/a	1
Beef Fat	Solid/Liquid			4	1	2	2	2	2
Benzene	Liquid	Aromatic HC		4	4	4	4	4	4
Benzoic Acid	Liquid	Carboxylic Acid (Aromatic)		4	4	4	1	1	4
Benzyl Alcohol	Liquid	Alcohol		4	4	4	4	4	4
Boric Acid	Liquid	Acid (weak)		1	1	1	1	1	1
Brake Fluid	Liquid	Ether/Glycol		4	4	4	4	4	4
Bromine	Liquid/Gas	Halogen		4	4	4	2	2	4
Butane	Liquid	Aliphatic HC		4	1	1	3	3	3
Butter	Solid/Liquid			4	1	2	1	1	2
Butyl Acetate	Liquid	Carboxylic Acid (Aliphatic)		4	4	4	3	3	4
Butyl Alcohol (butanol)	Liqud	Alcohol		1	1	1	1	1	3
Calcium Chloride	Solid	Inorganic Salt		1	1	1	2	2	1
Calcium Hydroxide	Solid	Metal Hydroxide		1	1	1	2	2	2
Carbolic Acid (liquid phenol)	Liquid	Acid (organic)		4	4	4	4	4	4
Carbon Monoxide	Gas	Inorganic Carbon Compound		3	2	2	1	1	1
Carbon Tetrachloride	Liquid	Halogenated Organic Liquid		4	3	3	4	4	4
Chicken Fat	Solid/Liquid			4	2	2	2	2	2
Chloroacetone	Liquid	Ketone		4	4	4	4	4	4
Chloroform	Liquid	Aliphatic HC		4	4	4	4	4	4
Chromic Acid	Liquid	Acid (weak)	50%	4	4	4	3	3	4
Citric Acid	Liquid	Acid (weak, organic)	10%	1	1	1	2	2	1
Corn Oil	Liquid	Fatty Acid		4	1	2	1	1	1
Cottonseed Oil	Liquid	Fatty Acid		4	2	3	1	1	1
Cyclohexane	Liquid	Aliphatic HC		4	1	1	4	4	2
Cyclohexanol	Liquid	Alcohol (cyclic)		4	3	3	1	1	---
Cyclohexanone	Liquid	Ketone		4	4	4	4	4	4
Dibutyl Phthalate	Liquid	Ester		4	4	4	3	3	4
Diesel fuel	Liquid	Petroleum HC		4	1	1	3	3	---
Diesel Oil	Liquid	Petroleum HC		4	1	1	3	3	3
Dioctyl Phthalate (DOP)	Liquid	Ester		4	3	3	4	4	4
Ethane	Liquid	Aliphatic HC		4	1	1	1	1	2
Ethyl Acetate	Liquid	Ester		2	4	4	3	3	4
Ethyl Alcohol (ethanol)	Liquid	Alcohol		1	1	1	3	3	4
Ethyl Ether	Liquid	Ether		4	3	3	3	3	3
Ethylene Glycol (antifreeze)	Liquid	Alcohol		1	1	1	1	1	4
Formaldehyde	Liquid	Aldehyde	37%	3	2	2	1	1	3
Formic Acid	Liquid	Acid (weak, organic)		2	2	2	1	1	4
Fresh Water	Liquid			1	1	1	1	1	1
Fuel Oil	Liquid	Aliphatic HC		4	1	1	2	2	3
Gasoline	Liquid	Aliphatic HC		4	1	1	3	3	2
Gear Oil (85w-140)	Liquid	Paraffin Oil		4	1	1	2	2	---
Glucose	Liquid	Sugar		1	1	1	1	1	1
Glycerin	Liquid	Alcohol		1	1	1	1	1	2
Heptane	Liquid	Aliphatic HC		4	1	1	2	2	2
Hexane	Liquid	Aliphatic HC		4	1	1	3	3	2
Hydraulic Fluid	Liquid	Aliphatic HC		4	1	1	2	2	4
Hydrazine	Liquid	Base (weak)		4	2	2	1	1	4
Hydrochloric Acid	Liquid	Acid (strong)	30%	2	4	4	2	2	4
Hydrofluoric Acid	Liquid	Acid (weak)	30%	4	4	4	3	3	4
Hydrogen Peroxide	Liquid			3	3	3	1	1	2

Iodine	Liquid	Inorganic Halogenated Compound		4	3	3	1	1	4
IRM 902	Liquid	Napathenic Oil		4	2	2	n/a	n/a	2
IRM 903	Liquid	Napathenic Oil		4	2	2	n/a	n/a	2
Jet Fuel	Liquid	Aromatic HC		4	1	1	3	3	3
Kerosene	Liquid	Aliphatic HC		4	1	1	3	3	2
Lacquers	Liquid	Aromatic HC (with alcohol)		4	4	4	4	4	4
Linoleic Acid	Liquid	Fatty Acid		4	2	2	---	---	---
Linseed Oil	Liquid	Fatty Acid		4	1	1	2	2	1
Methane	Liquid	Aliphatic HC		4	1	1	2	2	3
Methyl Alcohol (methanol)	Liquid	Alcohol		1	1	1	1	1	4
Methyl Ethyl Ketone (MEK)	Liquid	Ketone		4	4	4	4	4	4
Methyl Formate	Liquid	Alcohol		3	3	3	3	3	4
Methyl Isobutyl Ketone (MIBK)	Liquid	Ketone		4	4	4	4	4	4
Methyl Methacrylate	Liquid	Ester		4	4	4	1	1	4
Methylene Chloride	Liquid	Aliphatic HC (halogenated)		4	4	4	4	4	4
Mineral Oil	Liquid	Petroleum HC		4	1	1	3	3	1
Mineral Spirits	Liquid	Aliphatic HC		4	2	2	3	3	2
Motor Oil 10w-30 (natural)	Liquid	Paraffin Oil		4	1	2	2	2	2
Motor Oil 10w-30(synthetic)	Liquid	Paraffin Oil		4	1	2	2	2	2
Napathenic	Liquid	Aromatic HC		4	1	1	---	---	3
Naptha	Liquid	Aromatic HC		4	1	1	2	2	3
Nitric Acid	Liquid	Acid (strong)	Concentrated	4	4	4	2	2	4
Nitric Acid	Liquid	Acid (strong)	20%	4	4	4	2	2	4
Nitrobenzene	Liquid	Aromatic HC		4	4	4	4	4	4
Octane	Liquid	Aliphatic HC		4	1	1	2	2	4
Oleic Acid	Liquid	Acid		4	2	2	3	3	2
Oxalic Acid	Liquid	Acid (weak)		2	2	2	2	2	3
Peanut Oil	Liquid	Fatty Acid		4	2	2	1	1	2
Pentane	Liquid	Aliphatic HC		4	1	1	2	2	4
Perchloroethylene	Liquid	Aliphatic HC (chlorinated)		4	2	2	3	3	4
Petroleum	Liquid	Aliphatic HC		4	1	1	2	2	2
Phosphoric Acid	Liquid	Acid (weak)		2	3	3	1	1	4
Pine Oil	Liquid	Turpene/Alcohol/Ether	100%	4	3	4	4	4	2
Pine Oil	Liquid		20%=Pine-Sol	3	2	2	3	3	1
Potassium Hydroxide	Liquid	Base (strong)	50%	2	2	2	1	1	3
Power Steering Fluid	Liquid	Napathenic Oil		4	1	2	2	2	---
Propane	Liquid	Aliphatic HC		4	1	1	1	1	2
Propyl Alcohol (propanol)	Liquid	Alcohol		1	1	1	2	2	4
Propylene Dichloride	Liquid	Aliphatic HC		4	4	4	4	4	4
Salt Water	Liquid			1	1	1	1	1	1
Silicates	Solid	Alkali Metals		1	1	1	1	1	1
Silver Nitrate	Solid	Inorganic Salt		1	2	2	1	1	1
Sodium Bicarbonate	Solid	Inorganic Salt		1	1	1	1	1	1
Sodium Hydroxide	Liquid	Base (strong)		2	2	2	2	2	3
Sodium Hydroxide	Liquid	Base (strong)	0.34% = Mr. Clean	1	1	1	1	1	1
Sodium Hypochlorite (bleach)	Liquid	Base		1	1	1	1	1	4
Stearic Acid	Liquid	Fatty Acid		3	1	1	2	2	1
Styrene	Liquid	Aromatic HC		4	4	4	4	4	3
Sulfuric Acid	Liquid	Acid (strong)	10-75%	3	4	4	1	1	4
Sulfuric Acid	Liquid	Acid (strong)	Concentrated	4	4	4	4	4	4
Sulfuric Acid	Liquid	Acid (strong)	<10%	2	2	2	1	1	2
Tetrahydrofuran (THF)	Liquid	Ether		4	4	4	4	4	3
Toluene (methyl benzene)	Liquid	Aromatic HC		4	3	3	4	4	4
Transmission Fluid	Liquid	Napatheic or Paraffin Oil		4	1	1	2	2	1
Trinitrobenzene	Liquid	Aromatic HC		4	4	4	4	4	---
Turpentine	Liquid	Aliphatic HC		4	1	1	4	4	4
Vegetable Oil	Liquid	Aliphatic HC		4	1	2	1	1	1
Vinegar	Liquid	Acid (weak, organic)	5% Acetic Acid	3	1	1	1	1	3
Xylene	Liquid	Aromatic HC		4	4	4	4	4	4

LEGEND:
1 = Recommended
2 = Suitable for Use
3 = Useable, not recommended
4 = Not Recommended

Use of product in environments specified as “3” or “4” may lead to product failure and will void warranty.
These ratings are intended to be used as a guide only. For decisive results, please call for a free product sample for on-site testing in actual conditions.
Actual results may vary depending on concentration of chemicals. Ratings for products 470, 479, 782 refer to top surface.

NB: Under all circumstances regular cleaning is strongly recommended for hygienic/safety reasons and to reduce the effects of abrasion or aggressive industrial fluidson mats, thereby maintaining their effectiveness longer.